

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number No. 388, dated May 7th, 1881, executed by W. B. Barr. Surveyor General field notes state:

Set stake 4 ft. long 4 in diam 18 in ground for 1/4 sec. corner, from which:

Black Pine 8 in diam bears S25°W, 11 lks dist.
Tamarack 6 in diam bears S30°E, 10 lks dist.

T 5 S R 38 E L-17

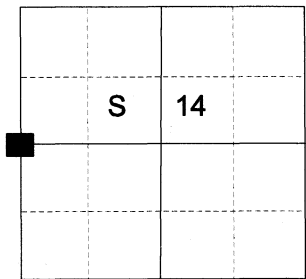

DESCRIPTION OF CORNER EVIDENCE FOUND:

No original evidence found.
Found 3 ft. diam. mound of stone with fence post and BLM approx. corner loc. tag which bears approx. 27 ft West of proportionate position.

SEE SURVEY NUMBER 029-2026

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position, I set a 2 1/2" x 30" aluminum pipe, 29" in the ground with a 2 ft. diam. collar of stone, with 3" aluminum cap marked as shown below, from which:


NEW BEARING OBJECTS:

- A 15" Ponderosa Pine bears North 8° East, a distance of 41.00 feet, marked 1/4 S14 BT.
- A 9" Ponderosa Pine bears South 2° East, a distance of 63.80 feet, marked 1/4 S14 BT.
- A 16" Ponderosa Pine bears South 50° West, a distance of 87.50 feet, marked 1/4 S15 BT.
- A 17" Ponderosa Pine bears North 83° West, a distance of 69.65 feet, marked 1/4 S15 BT.

Set steel fence post approx. 1 ft. North

I hereby certify that the corner was monumented on May 21, 2026

Witness: Kyle Tucker

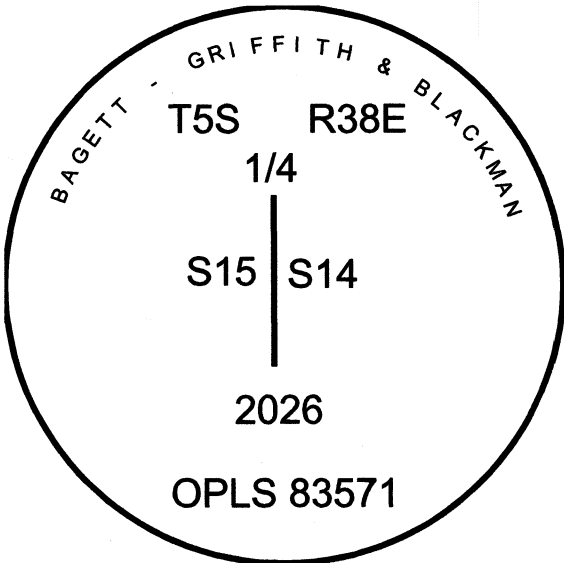

I used a tape and compass in the establishment of the bearing trees. 14° East was used for declination and measured to a brass washer marked "OPLS 83571" and tacked to the opened BT blaze. Distance was to a 60-D spike in the root crown on the right side of the tree.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2027

UNION COUNTY
SURVEYOR

Date Received 7/13/26

Date Filed 7/13/26

Filed By

File Number 026-2026R