


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:
Corner not previously established.

T 5 S R 38 E M-17

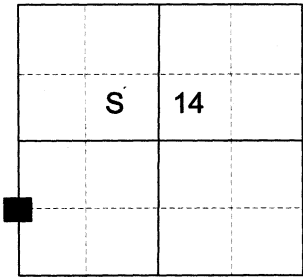

DESCRIPTION OF CORNER EVIDENCE FOUND:
No original evidence found.
Found BLM approx. corner loc. tag which bears approx. 20 ft
westerly of surveyed position.

SEE SURVEY NUMBER 029-2026
**DESCRIPTION OF MONUMENT AND ACCESSORIES I
ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION
OF THIS CORNER:**

At position by Survey I set a 5/8" x 30" iron pin, 25"
in the ground and in a 2 ft. diam. collar of stone, with
2 1/2" aluminum cap marked as shown below, from which:


NEW BEARING OBJECTS:

A 7" Lodge Pole Pine bears South 85° East, a distance of
18.45 feet, marked S1/16 S14 BT.
A 16" Douglas Fir bears North 36° West, a distance of
10.90 feet, marked S1/16 S15 BT.

Set steel fence post approx. 1 ft. North

I hereby certify that the corner was monumented on June
11, 2026

Witness: Kyle Tucker, Emily McClelland

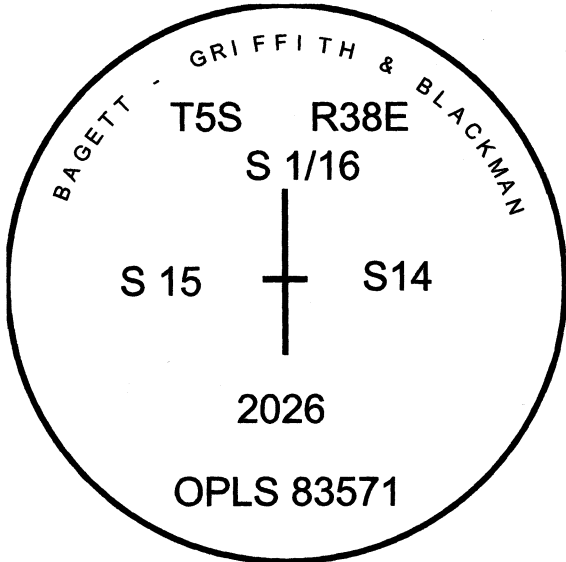

I used a tape and compass in the establishment of
the bearing trees. 14° East was used for
declination and measured to a brass washer marked
"OPLS 83571" and tacked to the opened BT blaze.
Distance was to a 60-D spike in the root crown on
the right side of the tree.

