


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Marked Basalt Stone 13x12x6 ins.; For corner to sections  
 14,15,22,23; from which;  
 Pine, 34 ins. diam., bears S58°W.; 27 lks dist.;  
 Pine 30 ins. diam bears S55°E., 105 lks dist.;  
 Fir, 28 ins. diam., bears N.74°W., 45 lks dist.  
 Fir, 10 ins diam, bears N. 34° E., 76 lks dist.;

N-17

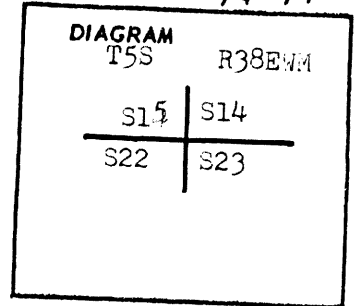

**Description of corner evidence found:**


Found dead pine with scribe at S58°W., 27 lks dist.;  
 Found down fir with scribe at N74°W., 45 lks dist.;  
 Found dead fir with scribe at N34°E., 76 lks dist.;

**Description of monument and accessories I established to perpetuate the original location of this corner**

At the position of the corner I set a 2 ins. pipe with brass cap on top from which I set the new bearing trees.

Marked the cap

White fir 18" in diam bears N28°W a dist of 53.4 ft.;  
 measured on the slope and marked, T5S, R38E S15BT.  
 Doug fir 10" diam bears N83°E measured on slope a  
 dist. of 39.9 ft.; marked T5S, R38E S14 BT.  
 Doug fir 24" diam bears S23°E measured on slope a dist.  
 of 82.7 ft.; marked T5S, R38E S23 BT.  
 Doug fir 16 " diam bears S 18°W measured on slope a dist. of  
 81. 7 ft. marked T5S, R38E S22 BT.;

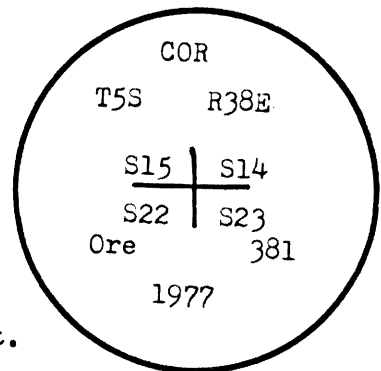

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*James G. Voelz*

Office of ..... County surveyor ..... County of ..... Union

State of Oregon ..... I hereby certify that the within instrument was filed in this office  
 for record on the 18 day of Nov. ....

**UNION COUNTY**  
**SURVEYOR**

OREGON  
 MAY 4, 1956  
 JAMES G. VOELZ  
 381

(COUNTY OFFICIAL)

(DEPUTY)

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 701-84R