


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original notes are as follows:
Set $\frac{1}{4}$ corner to S13, S24 from which;
A pine 16" in diam bears N22°W a dist of 125 lks.;
A Mahogany 5" in diam bears S65°E a dist of 22 lks.;

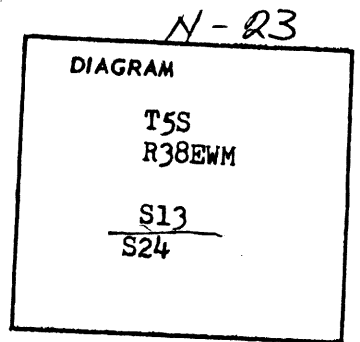

Description of corner evidence found:

At N22°W at a dist. of 125 lks a stump was found with scribe.

Description of monument and accessories established to perpetuate the original location of this corner

At the position of the corner I set a 2" pipe 30" long with a brass cap on top and at a depth of approx. 16"; A stone mound was placed around the pipe; From the corner the following bearing trees were established;
A 18" ponderosa pine bears N40°E at a dist of 47.8 ft. scribed $\frac{1}{4}$ SBT;
A 10" ponderosa pine bears S79°W at a dist. of 58.0 ft. scribed $\frac{1}{4}$ SBT;
U.S. Forest service bearing tree signs were placed on bearing trees found andset. All distance measured on surface of ground to BT scribe;

**UNION COUNTY
SURVEYOR**


Date Received _____

Date Filed _____

By _____

File No. 703-84R

I stamped the disk

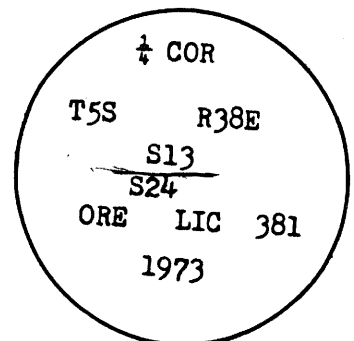

Office of Union County Surveyor County of Union
 State of Oregon I hereby certify that the within instrument was filed in this office
 for record on the 26 day of Aug, 19 73, at 1P o'clock PM (signed)
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
MAY 4, 1956
JAMES G. VOELZ
381

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by W. B. Barr under GLO Contract No. 388 dated May 7, 1881. Survey General States:


Marked basalt rock 16x10x for 1/4 sec corner. From which:
 Mahogany 5 in diam bears S65°E 22 lks dist
 Pine 16 in diam bears N22°W 125 lks dist

In 1973 James G. Voelz, finds:
 At N22°W a a dist. of 125 lks a stump was found with scribe.

From original corner evidence, he then sets a 2" pipe with a brass cap marked as shown below, 16" in the ground, raised a mound of stone. From which:

A 18" ponderosa pine bears N40°E at a dist of 47.8 ft. scribed 1/4SBT.
 A 10" ponderosa pine bears S79°W at a dist. of 58.0 ft. scribed 1/4SBT.

T 5 S R 38 E N-23



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" iron pipe with a 3" brass cap, 15" above ground, from which:

A 24" Ponderosa Pine bears N38°E, a distance of 43.65 feet alive and vigorous with scribe marks visible in partially healed blaze.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pipe monument

NEW BEARING OBJECTS:

A 11" Ponderosa Pine bears S 20° E, a distance of 65.90 feet, marked 1/4 S24 BT.
 A 15" Ponderosa Pine bears S 67° W, a distance of 58.00 feet, marked 1/4 S24 BT.
 A 14" Ponderosa Pine bears N 81° W, a distance of 62.00 feet, marked 1/4 S13 BT.

Raised a mound of stone 4 foot diameter to the top of the cap.


Corner monument falls 3.5 feet Southeast of fence corner.

I hereby certify that the corner was perpetuated on November 12, 2014.

Witness: Thomas J. Kopp



Renewal Date: June 30, 2015

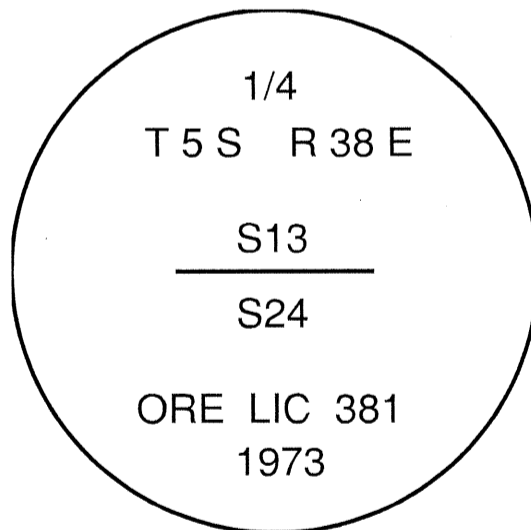

UNION COUNTY SURVEYOR

Date Received 11/13/14

Date Filed 11/13/14

Filed By [Signature]

File Number 072-2014

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2017003

1/4 SECTION CORNER COMMON TO SECTIONS 13 AND 24

TWP. 5 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: April 5, 2017

LAT: 45 ° 7 ' 19.72348 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 4 ' 14.61408 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 540575.724 INT FT.

E: 8846215.750 INT FT.

TYPE: GPS

THETA: 1 ° 46 ' 12.3100538 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998949118

ELEV: 4279.92 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" iron pipe with 3" brass cap marked
as shown 3.5 ft. Southeasterly of fence corner

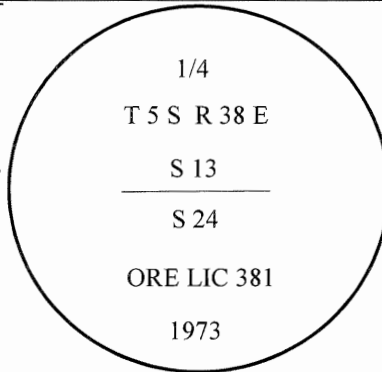

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2018

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)