


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

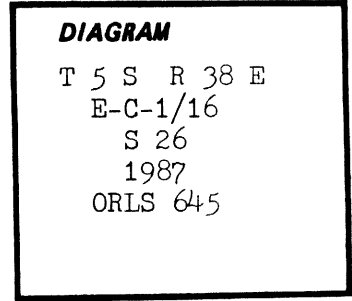

Description of corner evidence found:

No evidence found.

Description of monument and accessories I established to perpetuate the original location of this corner:

I established the position of this 1/16 corner by survey. I then set an Alum. cap on a 2" x 30" pipe, with a magnet fixed in the cap, at the corner location. I buried the pipe to within 6" above the surface of the ground. I then placed a mound of stone 3 feet dia. and 1 foot high about the pipe and covering the monument. From which I set two bearing trees:

A pine 11" dia. bears N 61 52 W, 34.35 feet and scribed 1/16S S 26 BT.
A pine 7" dia. bears S 00 52 E, 20.88 feet and scribed 1/16S S 26 BT.

UNION COUNTY SURVEYOR
Date Received 9-22-87
Date Filed 9-25-87
By G. LANGLITZ, DEPUTY
Sta No. 119-87 R

REGISTERED PROFESSIONAL LAND SURVEYOR
James H. Hambleton
9-25-87
OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

REFER TO SURVEY 28-87

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)