

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established by W. B. Barr under GLO Contract No. 388, dated May 7, 1881. Survey General States:


Marked basalt rock 16x10x6 for 1/4 sec cor from which:

Pine 16 in diam bears East 98 lks dist  
Pine 6 in diam bears S35°W 42 lks dist

In 1977 Jim Voelz re-established corner from original evidence.  
No record of remonumentation.

James Hambleton accepted this Brass Cap Monument in Survey 28-87 for Boise Cascade, dated November 2, 1987.

T 5 S R 38 E T-21

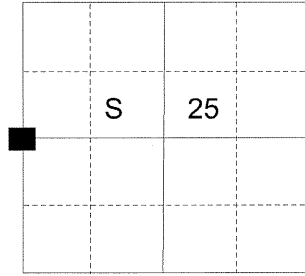

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 1 3/4" iron pipe with a 3" brass cap, 24" above ground, from which:

A 14" Ponderosa Pine bears S 48° E, a distance of 29.85 feet, alive and vigorous with a healed blaze.  
A 24" stump bears S 29° W, a distance of 27.70 feet. Blaze has been cut out to reveal scribe "BT".

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

From the iron pipe monument

**NEW BEARING OBJECTS:**

A 17" Ponderosa Pine bears N 19° E, a distance of 52.80 feet, marked 1/4 S25 BT.  
A 16" Ponderosa Pine bears S 80° W, a distance of 38.70 feet, marked 1/4 S26 BT.  
A 16' Ponderosa Pine bears N 54° W, a distance of 49.30 feet, marked 1/4 S26 BT.


I hereby certify that the corner was perpetuated on October 15, 2014.

Witness: Thomas J. Kopp

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*[Signature]*  
OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2015

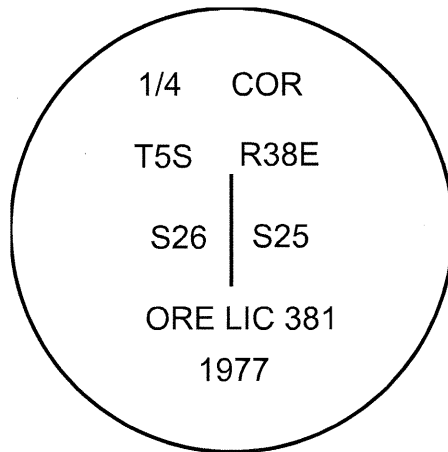

**UNION COUNTY  
SURVEYOR**  
Date Received 10/22/14  
Date Filed 10/22/14  
Filed By *[Signature]*  
File Number 057-201412

I used a steel tape and magnetic compass in the establishment of the new accessory. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing tree. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.