



~~Remonumentation of Certain Original Corner Points,  
T. 5 S., R. 38 E., Willamette Meridian, Oregon~~

CHAIN

CHAIN

~~Deposit corner stone and set a steel fence post  
alongside aluminum post.~~

The cor. of secs. 29, 30, 31, and 32, monumented with the original basalt stone, 10 x 8 x 8 ins., firmly set 5 ins. in the ground, no marks visible, from which the remains of the original bearing trees:

A fir stump, 10 ins. diam., bears N. 54° E., 18 lks. dist., with a down fir alongside, size indeterminate, with scribe marks T58 29 visible on open blaze. (Record, N. 59° E.)

A root hole, bears S. 32½° E., 17 lks. dist., with a down fir alongside, 5 ins. diam., with scribe marks S32 BT visible on open blaze.

A root hole, bears S. 8° W., 23 lks. dist., with a down larch alongside, 10 ins. diam., with scribe marks S31 BT visible on open blaze.

A root hole, bears N. 65° W., 17 lks. dist., with a down larch alongside, 15 ins. diam., with scribe marks S30 BT visible on open blaze.

At the corner point

Set an aluminum post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, in a collar of stone, with aluminum cap mkd.

T 5 S R 38 E  
S 30 | S 29  
S 31 | S 32  
1982

from which new bearing trees

A lodgepole pine, 5 ins. diam., bears N. 19° E., 34 lks. dist., mkd. T58 R38E S29 BT.

A fir, 22 ins. diam., bears S. 68° E., 19 lks. dist., mkd. T58 R38E S32 BT.

A fir, 10 ins. diam., bears S. 36° W., 21 lks. dist., mkd. T58 R38E S31 BT.

A fir, 11 ins. diam., bears N. 73° W., 30 lks. dist., mkd. T58 R38E S30 BT.

Deposit corner stone and set a steel fence post alongside aluminum post.

~~The ¼ sec. cor. of secs. 30 and 31, monumented with the original basalt stone, 16 x 6 x 5 ins., firmly set 12 ins. in the ground, in a collar of stone, no marks visible, from which the remains of an original bearing tree:~~

~~A saved larch stump, 16 ins. diam., bears S. 70° W., 68 lks. dist., with a down larch snag alongside, size indeterminate, with scribe marks ¼ S BT visible on open blaze. (Record, 73 lks.)~~

~~At the corner point~~

UNION COUNTY  
SURVEYOR

Date Received 2-2-84

Date Filed 2-28-84

By G. LANGLITZ, DEPUTY


File No. 823-84R

PAGE 2/2

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Original corner set by William B. Barr, under GLO Contract No. 388, approved December 31, 1881.  
 Record States: Marked basalt rock 10x8x8 for corner to secs. 29, 30, 31, 32, from which:  
 Fir, 5 in. dia., bears S 32 1/2° E, 17 lks dist.  
 Fir, 10 in. dia., bears N 59° E, 18 lks dist.  
 Tamarack, 15 in. dia., bears N 65° W, 17 lks dist.  
 Tamarack, 10 in. dia., bears S 8° W, 23 lks dist.

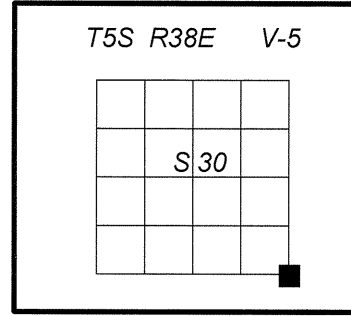


**Subsequent Monumentation**

Corner was remonumented by Scott R. McIntyre, under BLM Group No. 1000, approved December 27, 1983.  
 Record States: The cor of secs. 29, 30, 31, and 32, monumented with the original basalt stone, 10x8x8 ins., firmly set 5 ins. in the ground, no marks visible, from which the remains of the original bearing trees:  
 A fir stump, 10 ins. diam., bears N. 54° E., 18 lks. dist., with a down fir alongside, size indeterminate, with scribe marks T5S 29 visible on open blaze. (Record, N. 59° E.)  
 A root hole, bears S. 32 1/2° E., 17 lks. dist., with a down fir alongside, 5 ins. diam., with scribe marks S32 BT visible on open blaze.  
 A root hole, bears S. 8° W., 23 lks. dist., with a down larch alongside, 10 ins. diam., with scribe marks S31 BT visible on open blaze.  
 A root hole, bears N. 65° W., 17 lks. dist., with a down larch alongside, 15 ins. diam., with scribe marks S30 BT visible on open blaze.  
 At the corner point: Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, in a collar of stone, with aluminum cap mkd. (as shown below) from which new bearing trees:  
 A lodgepole pine, 5 ins. diam., bears N. 19° E., 34 lks. dist., mkd. T5S R38E S29 BT.  
 A fir, 22 ins. diam., bears S. 68° E., 19 lks. dist., mkd T5S R38E S32 BT.  
 A fir, 10 ins. diam., bears S. 36° W., 21 lks. dist., mkd. T5S R38E S31 BT.  
 A fir, 11 ins. diam., bears N. 73° W., 30 lks. dist., mkd. T5S R38E S30 BT.

**Description of corner evidence found:**

Found 2 1/2 ins. diam. alum. pipe, projecting 4 ins. above ground, with rock collar, and a standard BLM 3 1/4 ins. diam. alum. cap, marked as shown:  
 From the recovered monument I find the original bearing tree remains:  
 Down tree remains, bears S. 32° E., 17 lks dist., with scribe marks visible.  
 A root hole, bears S. 8° W., 15.2 ft. dist., with dead and down tree alongside and visible scribe marks.  
 And accessories mkd. by McIntyre:  
 A root hole, bears N. 19° E., 22.4 ft dist., with dead and down 5 in. diam. snag alongside and full scribe visible on open blaze.  
 A white fir, 27 ins. diam., bears S. 68° E., 12.5 ft. dist., alive and healthy, with healed blaze.  
 A fir stump, bears S. 36° W., 13.9 ft. dist., with full scribe visible on open blaze.  
 A white fir, 14 ins. diam., bears N. 73° W., 19.8 ft. dist., alive and healthy, with healed blaze.



Found guard post ±1.5 ft. W'ly with Land Survey Monument (54-9) sign attached.

**Description of monument and accessories I established to perpetuate original location of this corner:**

New bearing trees:  
 A white fir, 4 ins. diam., bears S. 24° W., 41.2 ft. dist., mkd. X BT on double blaze.  
 A lodgepole pine, 14 ins. diam., bears N. 12° W., 28.4 ft. dist., mkd. X BT on double blaze.  
 No suitable NE bearing trees.

All new bearing trees are marked on a single blaze unless noted otherwise and have a nail with a brass washer stamped "LS 2648" right side center for distance measurements.

Painted 6 ins. red bands and added Bearing Tree (54-3) and Land Survey Monument (54-9) signs as needed to all bearing trees.

Auto C/A geographic position:  
 Lat. 45°05'36.1" N  
 Long. 118°05'46.2" W

I hereby certify that the corner is monumented and accessories taken as described, using a Warren Knight staff compass, set with 15° East declination, and steel tape on June 18, 2014.

Witnesses: Kristina Powell

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

**Deceased**

OREGON  
JANUARY 18, 1994  
RON C. WALTER  
2648

Renewal Date: June 30, 2016

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Will R. Wells*

OREGON  
July 22, 1977  
WILLIAM R. WELLS  
1106

Renewal Date: June 30, 2016

**UNION COUNTY  
SURVEYOR**

---

Date Received 2/25/15  
 Date Filed 2/25/15  
 By W. G. Miller  
 File No. 035-2015R

**NOTE:** See "Explanation for Successor Certifying Surveyor" statement in Narrative of Record of Survey, CS 010-2015, filed concurrently with this Land Corner Record.