

V-11

R623

Form 9600-9
(December 1979)
(formerly 9180-6)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL.

23

FIELD NOTES
OF THE

REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 5 SOUTH, RANGE 38 EAST,

[Lined area for field notes]

Of the WILLAMETTE Meridian,
in the State of OREGON

EXECUTED BY

Scott R. McIntyre, Cadastral Surveyor

Under special instructions dated July 13, 19 79, approved July 17, 1979

_____, which provided for the surveys included under U.S. Survey/Group
Number 1000, and assignment instructions dated July 30, 19 82

Survey commenced AUGUST 20, 19 82

Survey completed AUGUST 31, 19 82

UNION COUNTY SURVEYOR	
Date Received	<u>2-2-84</u>
Date Filed	<u>2-28-84</u>
By	<u>G. LANGUITZ, DEPUTY</u>
File No.	<u>816-84 R</u>

Remonumentation of Certain Original Corner Points,
T. 5 S., R. 38 E., Willamette Meridian, Oregon

T 5 S R 38 E
S 29 | S 28
S 32 | S 33
1982

from which new bearing trees

A fir, 11 ins. diam., bears N. 88° E., 132½ lks.
dist., mkd. T5S R38E S28 BT.

A fir, 10 ins. diam., bears S. 44° E., 85 lks.
dist., mkd. T5S R38E S33 BT.

A larch, 13 ins. diam., bears N. 18° W., 69 lks.
dist., mkd. T5S R38E S29 BT.

Set a steel fence post alongside aluminum post.

Corner is located on W. edge of logging road, 20 lks.
wide, bears N. and S.

UNION COUNTY
SURVEYOR

Date Received 2-2-84

Date Filed 2-28-84

By G. LANGUITZ DEPUTY

File No. 816-84R

PAGE 2/2

The ¼ sec. cor. of secs. 28 and 33, determined at record
bearing and distance from the remains of the original
bearing trees:

A pine snag, 36 ins. diam., bears S. 20° E., 18
lks. dist., with scribe marks ¼ S BT visible on
open blaze.

A sawed pine stump, 36 ins. diam., bears N. 75° W.,
57 lks. dist., no marks visible.

At the corner point

Set an aluminum post, 28 ins. long, 2½ ins. diam., 21
ins. in the ground, in a collar of stone, with aluminum
cap mkd.

T 5 S R 38 E
¼ S 28
S 33
1982

from which new bearing trees

A ponderosa pine, 13 ins. diam., bears S. 24° E.,
37 lks. dist., mkd. ¼ S33 BT.

A fir, 28 ins. diam., bears N. 66° W., 31½ lks.
dist., mkd. ¼ S28 BT.

Corner is located in a fence line, extending N. and S.

The ¼ sec. cor. of secs. 28 and 29, monumented with the
original basalt stone, 16 x 12 x 4 ins., firmly set 10
ins. in the ground, no marks visible, from which the
remains of the original bearing trees:

A ponderosa pine, 21 ins. diam., bears N. 89° E.,
158 lks. dist., with healed blaze. (Record,
165 lks.)

A sawed pine stump, 40 ins. diam., bears S. 10½° W.,
244 lks. dist., no marks visible.


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by William B. Barr, under GLO Contract No. 388, approved December 31, 1881.
 Record States: Marked basalt rock 12x8x6 for 1/4 sec corner, from which:
 Pine, 36 in diam., bears S 20° E, 18 lks dist.
 Pine, 36 in diam., bears N 75° W, 57 lks dist.


Subsequent Monumentation

Corner was remonumented by Scott R. McIntyre, under BLM Group No. 1000, approved December 27, 1983.
 Record States: The 1/4 sec. cor. of secs. 28 and 33, determined at record bearing and distance from the remains of the original bearing trees:
 A pine snag, 36 ins. diam., bears S. 20° E., 18 lks. dist., with scribe marks 1/4 S BT visible on open blaze.
 A sawed pine stump, 36 ins. diam., bears N. 75° W., 57 lks. dist., no marks visible.
 At the corner point: Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a collar of stone, with aluminum cap mkd. (as shown below) from which new bearing trees:
 A ponderosa pine, 13 ins. diam., bears S. 24° E., 37 lks. dist., mkd 1/4 S33 BT.
 A fir, 28 ins. diam., bears N. 66° W., 31 1/2 lks. dist., mkd. 1/4 S28 BT.

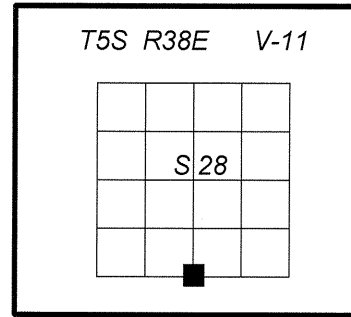

Description of corner evidence found:

Found 2 1/2 ins. diam. alum. pipe, projecting 6 ins. above ground, in rock collar, with standard BLM 3 1/4 ins. diam. alum. cap, marked as shown:
 From the recovered monument I find the original bearing tree remains:
 A rotting 6 ft. high pine stump, bears S. 20° E., 18 lks. dist., with scribing visible on open double blaze.
 A stump, bears N. 75° W., 57 lks. dist. to face, with burn marks and no visible scribe.
 And accessories mkd. by McIntyre:
 A ponderosa pine, 20 ins. diam., bears S. 24° E., 37 lks. dist., alive and healthy, with scribing visible on a partially healed blaze.
 A white fir, 30 ins. diam., bears N. 66° W., 31 1/2 lks. dist., alive and healthy, with healed blaze.
 Found guard post ±2 ft. Wly with Land Survey Monument (54-9) sign attached.



Description of monument and accessories I established to perpetuate original location of this corner:

New Bearing Trees:
 A ponderosa pine, 8 ins. diam., bears N. 32° E., 33.4 ft. dist., mkd. 1/4 S28 BT.
 A ponderosa pine, 13 ins. diam., bears S. 52° W., 111.1 ft. dist., mkd. 1/4 S33 BT.

All new bearing trees are marked on a single blaze and have a nail with a brass washer stamped "LS 2648" right side center for distance measurements.

Painted 6 ins. red bands and added Bearing Tree (54-3) and Land Survey Monument (54-9) signs as needed to all bearing trees.

Auto C/A geographic position:
 Lat. 45°05'35.6" N
 Long. 118°03'54.1" W

I hereby certify that the corner is monumented and accessories taken as described, using a Warren Knight staff compass, set with 15° East declination, and steel tape on June 13, 2014.

Witnesses: Kristina Powell and Brenda Johnson

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Deceased

OREGON
JANUARY 18, 1994
RON C. WALTER
2648

Renewal Date: June 30, 2016

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Will R. Wells

OREGON
July 22, 1977
WILLIAM R. WELLS
1106

Renewal Date: June 30, 2016

**UNION COUNTY
SURVEYOR**

Date Received 2/25/12
 Date Filed 2/25/12
 By [Signature]
 File No. 038-2015 R

NOTE: See "Explanation for Successor Certifying Surveyor" statement in Narrative of Record of Survey, CS 010-2015, filed concurrently with this Land Corner Record.