


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

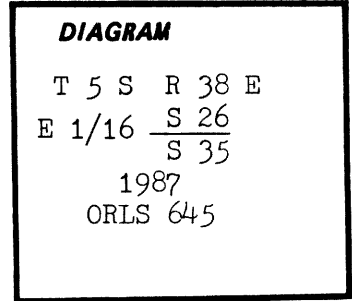

Description of corner evidence found:

No evidence found.

Description of monument and accessories | established to perpetuate the original location of this corner:

I established the position of this 1/16 corner by survey. I then set an Alum. cap on a 2" x 30" pipe, with a magnet fixed in the cap, at the corner location. I buried the pipe to within 12" above the surface of the ground. I then placed a large mound of stone 4 feet dia. and 1½ feet high about the pipe and covering the monument. From which I set two bearing trees:

A pine 12" dia. bears N 27 34 E, 161.15 feet and scribed 1/16S S 26 BT.
 A pine 20" dia. bears S 71 32 E, 118.20 feet and scribed 1/16S S 35 BT.

UNION COUNTY SURVEYOR	
Date Received	<u>9-22-87</u>
Date Filed	<u>9-25-87</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>118-87 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Hambleton

9-25-87 OREGON JULY 10, 1964 JAMES H. HAMBLETON 645

REFER TO SURVEY 28-87

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)