


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This $\frac{1}{4}$ corner was set by deputy surveyor W.B. Barr, under Contract No. 388, dated May 7, 1881. He states he set a marked basalt rock 14" x 10" x 6" with a raised mound of stone.

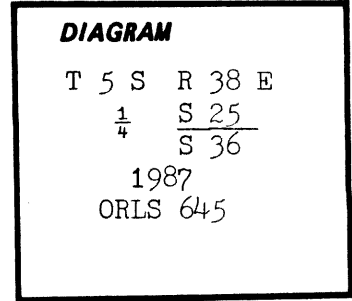

Description of corner evidence found:

At the assumed $\frac{1}{4}$ corner location I found a stone 14" x 11" x 8" with $\frac{1}{4}$ marked on the north face, in a small mound of 6 stones.

Description of monument and accessories I established to perpetuate the original location of this corner:

Accepting the marked stone as the original $\frac{1}{4}$ corner, I then set an Alum. cap on a 2" x 30" pipe, with a magnet fixed in the cap, at the center of the stone position. I buried the pipe 2" below the surface of the ground. I placed the marked stone upside down on the west side of the pipe with the $\frac{1}{4}$ mark facing the pipe. I then set a mound of stone 3 feet dia. and 1 foot high around the pipe and covering the monument. From which I set two new bearing trees:
A pine 9" dia. bears N 35 00 W, 31.90 feet and scribed $\frac{1}{4}$ S S 25 BT.
A pine 11" dia. bears S 06 30 E, 59.44 feet and scribed $\frac{1}{4}$ S S 36 BT.

UNION COUNTY SURVEYOR
Date Received <u>9-22-87</u>
Date Filed <u>9-25-87</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>111-87 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>James H. Hambleton</i>
9-25-87
OREGON JULY 10, 1964 JAMES H. HAMBLETON 645

REFER TO SURVEY 28-87

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL)

(DEPUTY)