


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

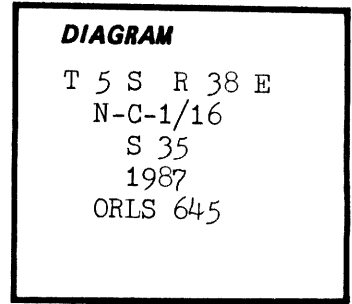

Description of corner evidence found:

No evidence found.

Description of monument and accessories | established to perpetuate the original location of this corner:

I established the position of this 1/16 corner by survey. I then set an Alum. cap on a 2" x 30" pipe, with a magnet fixed in the cap, at the corner location. I buried the pipe to within 12" above the surface of the ground. I then placed a large mound of stone four feet dia. and 1 1/2 feet high about the pipe and covering the monument. From which I set two bearing trees:

A pine 5" dia. bears S 48 32 E, 15.00 feet and scribed 1/16S S 35 BT.

A pine 5" dia. bears S 34 44 W, 18.70 feet and scribed 1/16S S 35 BT.

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>9-22-87</u>
Date Filed <u>9-25-87</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>117-87 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
---

*James H. Hambleton*  
9-27-87

OREGON JULY 10, 1964 JAMES H. HAMBLETON 645
--

REFER TO SURVEY 28-87

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)