


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

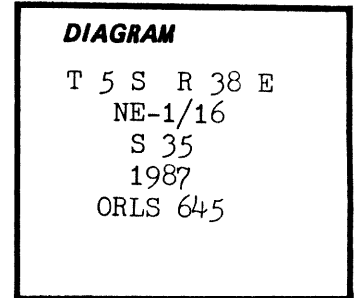

Description of corner evidence found:

No evidence found.

Description of monument and accessories I established to perpetuate the original location of this corner:

I established the position of this 1/16 corner by survey. I then set an Alum. cap on a 2" x 30" pipe, with a magnet fixed in the cap, at the corner location. I buried the pipe to within 12" above the surface of the ground. I then placed a mound of stone 3 feet dia. and 1½ feet high about the pipe and covering the monument. From which I set two bearing trees:

A pine 10" dia. bears N 12 46 E, 36.00 feet and scribed 1/16S S35 BT.

A pine 9" dia. bears S 32 23 E, 39.65 feet and scribed 1/16S S35 BT.

UNION COUNTY SURVEYOR
Date Received <u>9-22-87</u>
Date Filed <u>11-2-87</u>
by <u>G. LANGLIT, DEPUTY</u>
File No. <u>151-87R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>James H. Hambleton</i>
<u>9-25-87</u>
OREGON JULY 10, 1964 JAMES H. HAMBLETON 645

REFER TO SURVEY 28-87

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)