


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

This  $\frac{1}{4}$  corner was set by deputy surveyor D. P. Thompson, under Contract No. 103, dated Sept. 3, 1863. He states he set a post for  $\frac{1}{4}$  corner in a mound of stone.

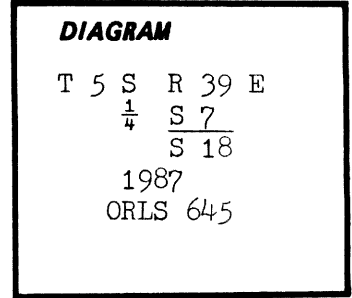

**Description of corner evidence found:**

At the assumed  $\frac{1}{4}$  corner location I found a small mound of stone adjacent to an existing rock jack at the corner of an ancient fence. No other evidence was available.

**Description of monument and accessories established to perpetuate the original location of this corner:**

With no other evidence available and the corner position appears correct by survey, I accepted the center of the mound of stone to be the true  $\frac{1}{4}$  corner location. I then set an Alum. cap on a 2" x 30" pipe, with a magnet fixed in the cap, at the corner location. I buried the pipe flush with the ground surface and placed a mound of stone 4 feet dia. and 2 feet high covering the monument. No bearing trees are available in the vicinity of this corner.

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>9-22-87</u>
Date Filed <u>9-25-87</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>131-87 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
---

*James H. Hambleton*  
9-25-87

OREGON JULY 10, 1964 JAMES H. HAMBLETON 645
--

REFER TO SURVEY 28-87

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

LI  
W