


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by contract.; The Notes indicate following:
Set one quarter corner to S 13 ; S18 from which.;
A pine 16" in diam bears N40°W a dist of 34 lks..
A pine 24" in diam bears S50°W a dist of 100 lks.;



Description of corner evidence found:

Evidence of bearing tree was found at N40°W at a dist of 34 lks.;

Description of monument and accessories | established to perpetuate the original location of this corner

At the position of the corner I set a 2" pipe 30" in length approx. 2 feet deep with stone placed around the pipe and brass cap on top.
From the corner I set the following bearing trees.;
A 10" ponderosa pine bears N44°W a dist of 28.1 ft. scribed ¼SBT;
A 12" Red Fir bears S40°E a dist of 4.4 ft.; scribed ¼SBT;
I placed U.S. Forest Service bearing tree signs on old and new bearing trees.;
All distance measure to BT scribe on surface of ground.;

UNION COUNTY SURVEYOR


Date Received _____

Date Filed _____

By _____

File No. 713-84R

I stamped the disk;

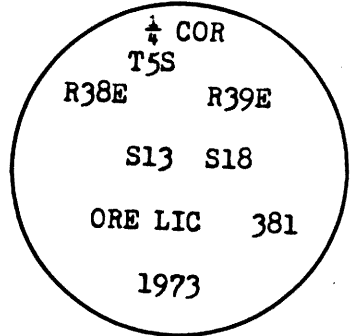

Office of County Surveyor County of Union
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 15 day of Aug., 1973, at _____ o'clock 2., (signed)
[Signature] by _____ (DEPUTY)
(COUNTY OFFICIAL)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]
OREGON
MAY 4, 1956
JAMES G. VOELZ
341

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Timothy W. Davenport under GLO contract no. 102, dated July 20, 1863. Surveyor General field notes state:

Set qr.Sec. Post from which:

- A Pine 16 in. dia. bears N40°W, 34 lks.
- A Pine 24 in. dia. bears S50°W, 100 lks.


In 1973, James Voelz brings the corner to county standard from the original NW bearing tree. Union County Monumentation Record 713-84R states:

Evidence of bearing tree was found at N40°W at a dist of 34 lks.

At the position of the corner I set a 2" pipe 30" in length approx. 2 feet deep with stone placed around the pipe and brass cap on top. From the corner I set the following bearing trees:

- A 10" Ponderosa Pine bears N44°W, a dist of 28.1 feet, scribed 1/4 SBT.
- A 12" Red Fir bears S40°E, a dist. of 4.4 feet, scribed 1/4 SBT.

T 5 S R 38 E L-25



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" iron pipe with 3" brass cap, marked as shown below, protruding 18" above ground in a mound of stone 2 1/2 ft. diam., from which:

- A 15" stump bears North 38° West, a distance of 22.4 feet, blaze evident.
- A 22" Douglas Fir bears South 40° East, a distance of 4.4 feet, alive and vigorous with healed blaze.
- No remains of the NW Voelz bearing tree.

SEE SURVEY NUMBER 010-2017

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pipe monument,

NEW BEARING TREE:

An 11" Ponderosa Pine bears North 13° West, a distance of 9.95 feet, marked 1/4 S13 BT.

I hereby certify that the corner was perpetuated April 6, 2017.


UNION COUNTY SURVEYOR

Date Received 4/11/17

Date Filed 4/11/17

Filed By [Signature]

File Number 003-2017R

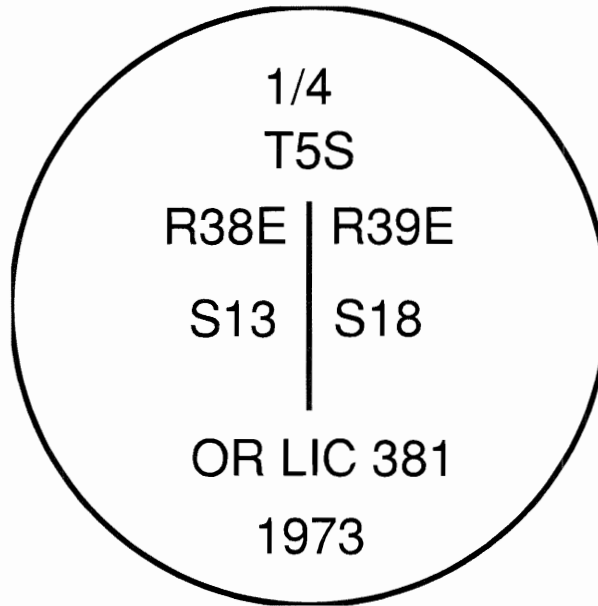

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]

OREGON
June 2, 2010

JEFFREY S. HSU

83571

Renewal Date: June 30, 2017

I used a steel tape and magnetic compass in the establishment of the bearing trees. Magnetic declination used was 13° East. Bearings and distances are to the center of the tree.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2017004

1/4 SECTION CORNER COMMON TO SECTIONS 13 AND 18

TWP. 5 S. RGE. 38 & 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: April 6, 2017

LAT: 45 ° 7 ' 46.97234 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 59 ' 37.78896 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 543415.634 INT FT.

E: 8848769.121 INT FT.

TYPE: GPS

THETA: 1 ° 46 ' 38.4259134 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998948135

ELEV: 3923.85 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" iron pipe with 3" brass cap marked
as shown 18" exposed with rock mound

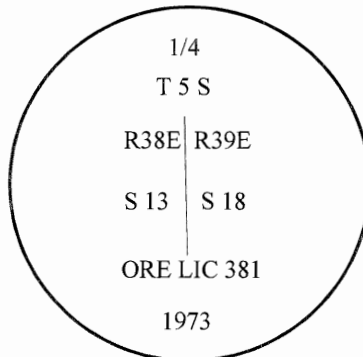

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)