


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract number 443 dated June 29, 1882. Surveyor General record states;

Set tamarack stake 4 ft long 4 in diam for 1/4 sec cor from which;

A tamarack 10 in diam bears N87°W 52 lks dist
A pine 6 in diam bears S71°W 40 lks dist

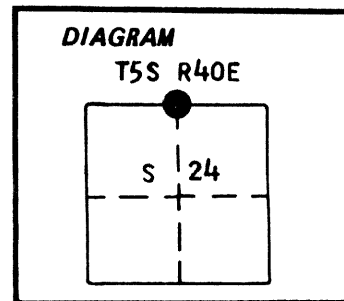

No record of subsequent remonumentation found
Description of corner evidence found:

Found charcoal 16 inches below surface of ground, possibly the post

Found 20 inch diameter Tamarack stump N87°E 52 lks, rotted with scribes visible
Found a 12 inch diameter P.Pine S71°W 40 lks dead down and rotted, no scribes visible

The Northeast Tamarack found is called Northwest in Mr. Barr's notes.

See map of survey dated June, 1986


Description of monument and accessories I established to perpetuate the original location of this corner: At S87°W, 52 lks from the above described Tamarack bearing tree, I set a 2 1/2'x30" aluminum pipe with aluminum cap marked as shown 28 inches in the ground with small mound of stone, from which;

New BTs

A 18 inch diameter White Fir bears S23°E 54.19 feet marked 1/4 S24 BT
A 16 inch diameter White Fir bears N59°W 74.25 feet marked 1/4 S13 BT

Set steel fencepost approximately 5 feet East with 54-9 sign

Corner remonumented May 13, 1986
Witnesses: Greg Blackman and Rick Robinson

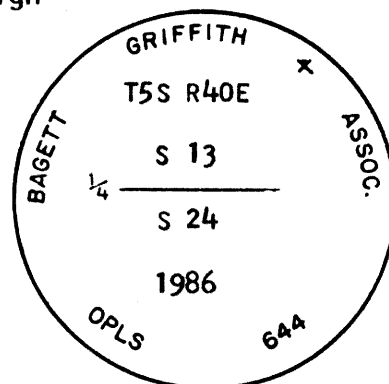

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise noted.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received 6-5-86

Date Filed 6-18-86

By G. LANGLITZ DEPUTY

File No. 74-86 R