


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner not established in original survey

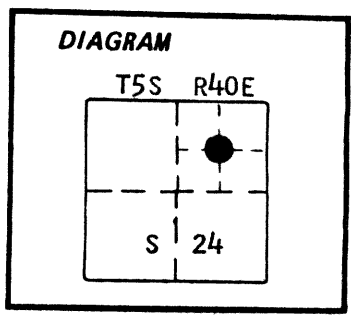

No record of subsequent remonumentation found in county records

Description of corner evidence found:  
NONE

**UNION COUNTY SURVEYOR**

---

Date Received 6-5-86

Date Filed 6-18-86

By G. LANGLITZ, DEPUTY

File No. 69-86 R


See map of survey dated June, 1986

Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, with mound of stone 4 ft. base to top of cap from which:

- New BTs
- A 15 inch diameter White Fir bears S24° E 27.24 feet marked NE 1/16 S24 BT
  - A 18 inch diameter White Fir bears S88° W 3.58 feet marked NE 1/16 S24 BT on single blaze

Set steel fenceposts approximately 5 feet East with 54-2 sign and approximately 5 feet North with 54-2 and 54-9 signs attached

Corner set May 27, 1986  
Witness: Rick Robinson

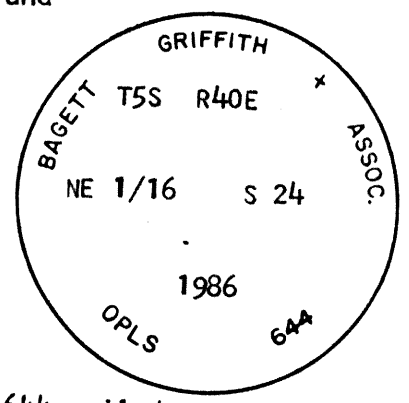

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Duane I. Griffith*

OREGON  
JULY 10, 1954  
**DUANE I. GRIFFITH**  
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)