


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract number 443 dated June 29, 1882. Surveyor General record states;

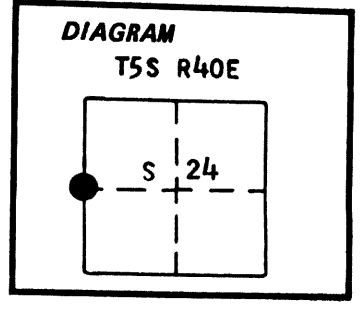

- Planted a lava rock 16x11x5 for 1/4 sec cor from which;
- A pine 16 in diam bears N82°W 100 lks dist
- A pine 24 in diam bears S63°E 18 lks dist

No record of subsequent remonumentation found
Description of corner evidence found:

Found a stone 18x11x5 inches marked 1/4 in small mound of stone

Found a 28" P.Pine stump S63°E 18 lks with faint scribes visible

Found a 22" P.Pine stump N82°W 100 lks, bottom of blaze visible with ax marks

UNION COUNTY SURVEYOR

Date Received 6-5-86

Date Filed 6-18-86

By G. LANGUITZ, DEPUTY

File No. 67-86 R

See map of survey dated June, 1986

Description of monument and accessories established to perpetuate the

original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground with mound of stone 3 ft. base to top of cap, from which:

New BTs


- A 17 inch diameter Red Fir bears S60°E 8.10 feet marked 1/4 S24 BT
- A 11 inch diameter P.Pine bears S80°W 14.55 feet marked 1/4 S23 BT

Buried the original corner stone South and alongside of monument

Set steel fencepost approximately 5 feet North with 54-9 sign

Corner remonumented May 8, 1986

Witnesses: Greg Blackman and Rick Robinson

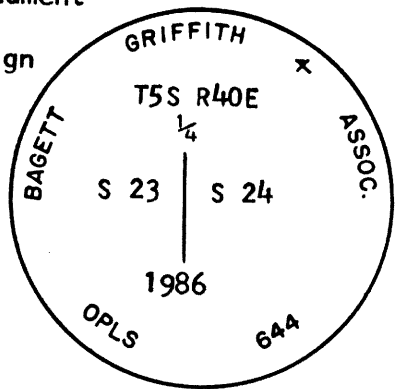

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise noted.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)