


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

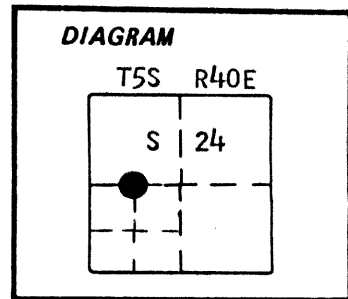

No record of subsequent remonumentation found in county records

Description of corner evidence found:

NONE

**UNION COUNTY SURVEYOR**

---

Date Received 6-5-86

Date Filed 6-18-86

By G. LANGRIS, DEPUTY

File No. 66-86 R

See map of survey dated June, 1986


Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground with mound of stone 3 ft. base to top of cap from which:

New BTs

- A 19 inch diameter White Fir bears S67°E 7.74 feet marked CW 1/16 S24 BT
- A 9 inch diameter Red Fir bears S19°W 21.47 feet marked CW 1/16 S24 BT

Set steel fenceposts approximately 5 feet South with 54-2 sign and approximately 5 feet North with 54-2 and 54-9 signs attached

Corner monumented May 27, 1986  
Witness: Rick Robinson

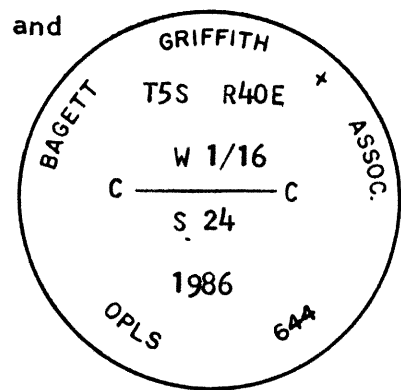

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*[Handwritten Signature]*

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)