


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

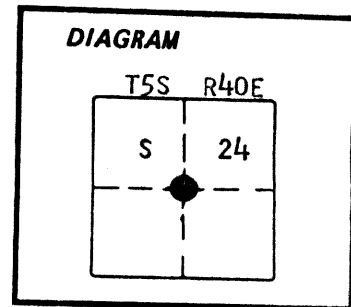

No record of subsequent remonumentation found in county records

Description of corner evidence found:

NONE

**UNION COUNTY SURVEYOR**

---

Date Received 6-5-86

Date Filed 6-18-86

By G. LANGRIZ, DEPUTY

File No. 65-86 R

See map of survey dated June, 1986

Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground with mound of stone 3 ft. base to top of cap from which;

New BTs

A 12 inch diameter P.Pine bears S57°E 1.72 feet marked X BT

A 17 inch diameter P.Pine bears S47°W 2.52 feet marked C 1/4 S24 BT


Set steel fencepost approximately 5 feet North with 54-9 sign attached

Corner set May 30, 1986

Witness: Greg Blackman

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*[Signature]*  
OREGON  
JULY 10, 1984  
**DUANE I. GRIFFITH**  
044

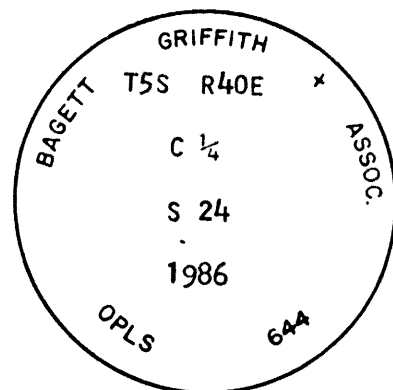

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....  
..... by .....

(COUNTY OFFICIAL)

(DEPUTY)