


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

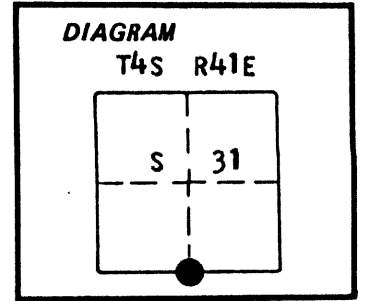

Set stone 27x19x9 for 1/4 sec cor from which:

- A pine 33 in dia bears N25°W 62 lks dist
- A pine 30 in dia bears S40°E 18 lks dist

Corner was found in 1888 by J.W. Kimbrell Union County Surveyor

No record of subsequent monumentation found in county records

Description of corner evidence found:

Found a stone 26x19x7 inches marked 1/4 S

Found a 1 1/2"x24" pipe filled with concrete with brass washer marked CX 6 1973

Found a stump hole S40°E 18 lks

UNION COUNTY SURVEYOR

Date Received 7-28-86

Date Filed 8-19-86

By G. LANGLIT, DEPUTY

File No. 119-86 R


Description of monument and accessories I established to perpetuate the original location of this corner: In place of pipe, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground from which;

New BTs

- A 16 inch diameter Tamarack bears N74°E 27.79 feet marked 1/4 S31 BT
- A 13 inch diameter P. Pine bears S25°W 13.93 feet marked 1/4 S6 BT

- Buried the original stone West and alongside of monument
- Placed pipe with brass washer inside of aluminum monument
- Set steel fencepost approximately 5 feet East with 54-9 sign

Corner monumented July 8, 1986
Witnesses: Greg Blackman and Rick Robinson

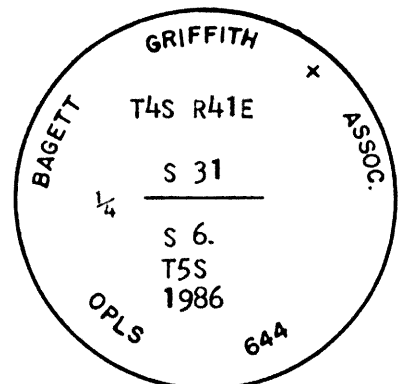

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL)

(DEPUTY)