


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

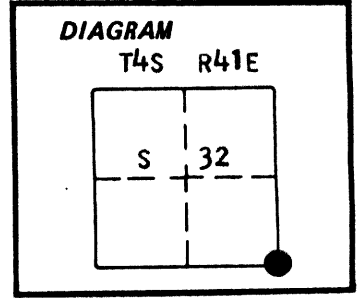

Set stone 16x14x4 for cor to secs 4,5,32 and 33  
Raised stone mound at cor

No record of subsequent remonumentation found in County Records.  
Description of corner evidence found:

NONE

**UNION COUNTY SURVEYOR**

Date Received 7-28-86

Date Filed 8-19-86

By S. LANGLEY, DEPUTY


File No. 122-86 R

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 10" in the ground and raised a mound of stone with a 6 foot base to top of cap, from which:

- A 14 inch Ponderosa Pine bears N 61° E, 23.48 feet, marked T4S R41E S 33 BT.
- A 19 inch Douglas Fir bears S 84° E, 55.66 feet, marked T5S R41E S 4 BT.
- A 12 inch Douglas Fir bears S 57° W, 61.34 feet, marked T5S R41E S 5 BT.
- A 6 inch Ponderosa Pine bears N 37° W, 10.06 feet, marked X BT.

I set a steel fence post approximately 5 feet East with a 54-4 sign attached.

Corner set 7/22/86  
Witness: Greg Blackman

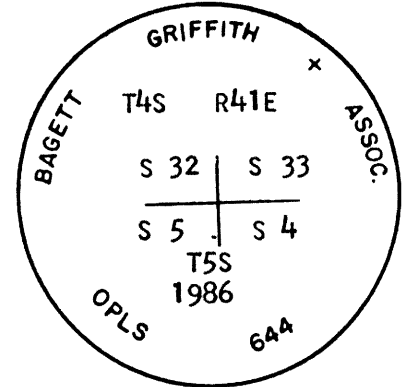

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL) (DEPUTY)

480

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
	<p><del>A fir, 10 ins. diam., bears S. 70° E., 62 lks. dist., with scribe marks ¼ S4 BT on open blaze.</del></p> <p><del>A fir, 5 ins. diam., bears N. 62½° W., 67 lks. dist., with scribe marks ¼ S5 BT on open blaze.</del></p>
	N. 0° 32' 30" E., beginning new measurement.
1.00	Stream, 5 lks. wide, course S. 20° W.; continue along streambed.
5.00	Ascend SW. slope, through medium timber and light undergrowth.
35.815	<p>The cor. of secs. 4, 5, 32, and 33 on the N. bdy. of the Tp., reestablished by proportionate measurement and recorded by Duane L. Griffith, Oregon Registered Land Surveyor No. 644, in 1986, recorded under file No. 22-86. There is no remaining evidence of the original corner; therefore, this position is accepted as the corner, monumented with an aluminum post, 2½ ins. diam., firmly set, projecting 20 ins. above ground, and in a mound of stone, 3½ ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">BAGETT GRIFFITH ASSOC T 4 S R 41 E S 32   S 33 S 5   S 4 T 5 S 1986 OPLS 644</p> <p>from which bearing trees mkd. by Griffith</p> <p>A ponderosa pine, 15 ins. diam., bears N. 59° E., 35 lks. dist., with fragmentary scribe marks on partially healed double blaze.</p> <p>A Douglas fir, 20 ins. diam., bears S. 84° E., 84 lks. dist., with scribe marks T5S R41E S4 BT on open double blaze.</p> <p>A Douglas fir, 12 ins. diam., bears S. 55° W., 92 lks. dist., with pitched over double blaze.</p> <p>A ponderosa pine, 8 ins. diam., bears N. 40° W., 15½ lks. dist., with pitched over double blaze.</p> <p><del>From this point, the ¼ sec. cor. of secs. 5 and 32 on the N. bdy. of the Tp., perpetuated from the original corner stone, no longer visible, and recorded by Duane I. Griffith, Oregon Registered Land Surveyor No. 644, in 1986, recorded under file No. 22-86, bears N. 89° 51' 00" W., 38.310 chs. dist., monumented with an aluminum post, 2½ ins. diam., firmly set, projecting 3 ins. above a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</del></p>

<b>UNION COUNTY SURVEYOR</b>	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>RLG</i>
File No.	020-2013R