


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

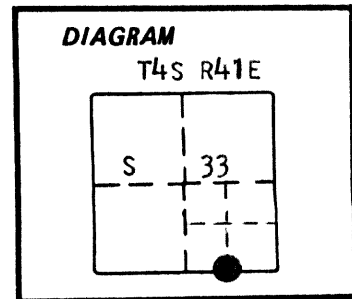

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR

Date Received 7-28-86

Date Filed 8-19-86

By G. LANGRISH DEPUTY

File No. 124-86 R

Description of monument and accessories I established to perpetuate the

original location of this corner: At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 14 inches in the ground and raised a mound of stone with a 5 foot base to top of cap, from which:


A 12 inch Douglas Fir bears S 5° E, 27.45 feet, Marked E 1/16 S 4 BT.

A 10 inch Ponderosa Pine bears N 69° W, 13.69 feet, marked E 1/16 S 33 BT.

I set a steel fence post approximately 5 feet West with a 54-9 sign attached.

Corner set 7/22/86

Witness: Greg Blackman

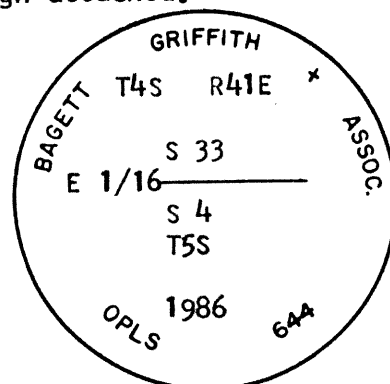

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)