


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 16x14x8 for cor to secs 3,4,33 and 34  
Raised stone mound at cor

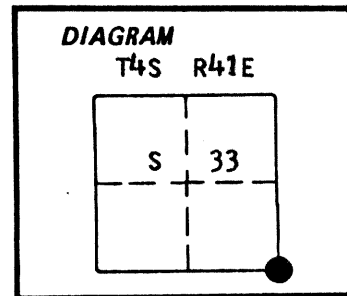

No record of subsequent monumentation found in county records

Description of corner evidence found:

Found a stone 15x12x8 inches marked with 3 notches on the East and West and 5/41 on the South visible

UNION COUNTY SURVEYOR	
Date Received	<u>7-28-86</u>
Date Filed	<u>8-19-86</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>125-86 R</u>



Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 18 inches in the ground with mound of stone 3 ft. base to top of cap from which:

New BTs

- A 14 inch diameter double bole P.Pine bears N85°E 45.13 feet marked T4S R41E S34 BT
- A 16 inch diameter P.Pine bears S3°E 35.81 feet marked T5S R41E S3 BT
- A 7 inch diameter Red Fir bears S82°W 30.90 feet marked X BT
- A 19 inch diameter P.Pine bears N60°W 35.86 feet marked T4S R41E S33 BT

Buried original stone North and alongside of monument  
Set steel fencepost approximately 5 feet North with 54-4 sign

Corner monumented June 25, 1986  
Witnesses: Greg Blackman and Rick Robinson

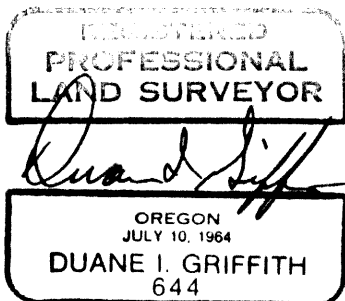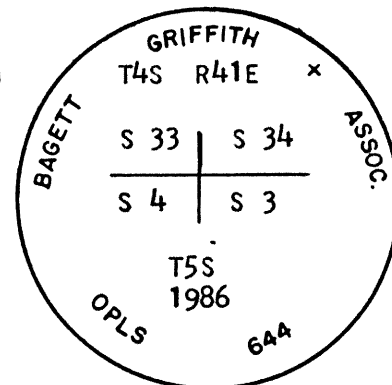

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
36.870	<p>Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 5 S R 41 E S 4   S 3 1990</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 22 ins. diam., bears S. 85° E., 43 lks. dist., mkd. 1/4 S3 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 18 ins. diam., bears S. 83° W., 80 lks. dist., mkd. 1/4 S4 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p> <p>Continue along broken W. slope.</p>
54.30	Broad spur, slopes W.
55.305	<p>Point for the N 1/16 sec. cor. of secs. 3 and 4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S 4   S 3 1990</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 15 ins. diam., bears S. 42 1/2° E., 126 lks. dist., mkd. N 1/16 S3 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears S. 1° E., 92 lks. dist., mkd. N 1/16 S4 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p> <p>Descend steep NW. slope through medium timber and undergrowth to Little Catherine Creek; thence asc.</p>
73.840	<p>The cor. of secs. 3, 4, 33, and 34 on the N. bdy. of the Tp., perpetuated from the original corner stone, no longer visible, and recorded by Duane I. Griffith, Oregon Registered Land Surveyor No. 644, in 1986, recorded under file No. 22-86, monumented with an aluminum post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>

<b>UNION COUNTY SURVEYOR</b>	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>[Signature]</i>
File No.	022-2013R

468

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	<p style="text-align: center;">BAGETT GRIFFITH AND ASSOC T 4 S R 41 E S 33   S 34 S 4   S 3 T 5 S 1986 OPLS 644</p> <p>from which bearing trees mkd. by Griffith</p> <p>A ponderosa pine, 14 ins. diam., bears N. 85° E., 72 lks. dist., with fragmentary scribe marks on partially healed double blaze.</p> <p>A ponderosa pine, 21 ins. diam., bears S. 4° E., 55 lks. dist., with fragmentary scribe marks on partially healed double blaze.</p> <p>A fir, 10 ins. diam., bears S. 83° W., 47 lks. dist., mkd. X BT on open double blaze.</p> <p>A ponderosa pine, 20 ins. diam., bears N. 59° W., 55 lks. dist., with fragmentary scribe marks on partially healed double blaze.</p>
20.145	<p>From the standard cor. of secs. 32 and 33 on the S. bdy. of the Tp. N. 0° 35' 30" E., bet. secs. 32 and 33. Descend gradual N. slope through medium timber and light undergrowth. Point for the S 1/16 sec. cor. of secs. 32 and 33. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S 1/16 S 32   S 33 1991</p>
24.50	<p>from which</p> <p>A lodgepole pine, 14 ins. diam., bears N. 48¼° E., 159 lks. dist., mkd. S 1/16 S33 BT.</p> <p>A lodgepole pine, 17 ins. diam., bears N. 41¾° W., 50 lks. dist., mkd. S 1/16 S32 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base and set a 6 ft. steel fence post alongside the stainless steel post.</p> <p>Descend N. slope through logged area.</p>
38.25	<p>Ravine, drains N. 30° W.; desc. NW. slope through logged area.</p> <p>Dirt road, 15 lks. wide, bears N. 30° W. and S. 30° E.</p>

UNION COUNTY  
SURVEYOR

Date Received 3/5/13

Date Filed 3/5/13

By M. G. Miller

File No. 022-203R