


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 15x13x7 for 1/4 sec cor
Raised stone mound at cor

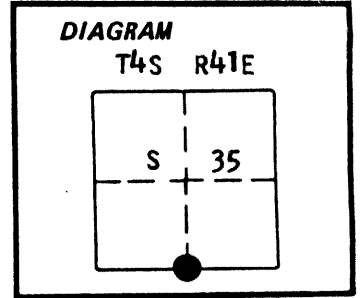

No record of subsequent monumentation found in county records

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR

Date Received 7-28-86
 Date Filed 8-19-86
 By G. LANGRISH DEPUTY
 File No. 127-86 R

Description of monument and accessories I established to perpetuate the

original location of this corner: At proportionate position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 26 inches in the ground with mound of stone 3 ft. base to top of cap from which:


New BTs

A 13 inch diameter White Fir bears N 89° E , 6.76 feet, marked 1/4 S 35 BT.
 A 16 inch diameter White Fir bears S 4° E, 16.17 feet, marked 1/4 S 2 BT.

Set steel fencepost approximately 5 feet East with 54-4 sign attached

Corner monumented July 2, 1986

Witnesses: Greg Blackman and Rick Robinson

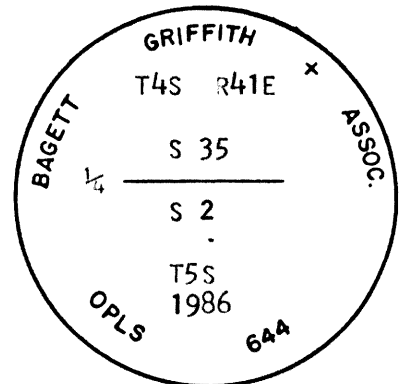

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

OREGON
 JULY 10, 1964
 DUANE I. GRIFFITH
 644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)