

G-9 T55 R41E

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" IRON POST 28" Long Set 20" IN GROUND
AND A Mound of stone 2' BASE To Top
with 5' Steel Fence Post Alongside

T55 R41E
1/4
1971
BRASS
CAP
MKD

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A P. Pine 10" BRS S 75° E 52 1/2 LKS 1/4 S9 BT
A P PINE 10" BRS N 41 3/4° W 96 LKS 1/4 S8 BT

Work Done By S. ABRIGHT Title CADASTRAL SURVEYOR Date 1/27/71 State Registration No. B1M7 or Agency

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Index File No. T. R. M. Tract or Surv. No. Cor. 12 13

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	<u>12-24-87</u>
By	<u>G. LANGLITZ, DEPT</u>
File No.	<u>424-87R</u>

G-9

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
	<p>Deposit a white "DEEP-1" magnetic marker at the base and the corner stone alongside the stainless steel post.</p> <p>From the $\frac{1}{4}$ sec. cor. of secs. 8 and 17, the corner of wire fences extending W. and S., bears S. 7° W., 0.360 chs. dist.</p> <p>Also, from the $\frac{1}{4}$ sec. cor. of secs. 8 and 17, an iron pipe, 2 ins. diam., firmly set, projecting 4 ins. above ground, with metal washer mkd. CX-12 1973 at the center of a mound of stone, with a steel reinforcing rod, $\frac{5}{8}$ in. diam., alongside, bears S. 0° 28' 30" E., 0.346 chs. dist.</p>
	<p>N. 1° 44' 30" W., bet. secs. 8 and 9.</p>
	<p>Ascend SW. slope through medium timber and light undergrowth.</p>
0.25	<p>Barbed wire fence, extends E. and W.</p>
38.95	<p>Graveled road, 20 lks. wide, bears N. 75° E. and S. 75° W.</p>
39.825	<p>The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set, projecting 8 ins. above ground, and in a mound of stone, $2\frac{1}{2}$ ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T 5 S R 41 E S 8 $\frac{1}{4}$ S 9 1971</p> <p>from which remains of the original bearing trees</p> <p>A root hole, bears N. 45° E., 24 lks. dist., with remains of a pine alongside, with axe marks.</p> <p>A small depression in the ground, bears N. 80° W., 20 lks. dist.</p> <p>and bearing trees mkd. by Albright</p> <p>A ponderosa pine, 16 ins. diam., bears S. 78° E., 52$\frac{1}{2}$ lks. dist., with scribe marks $\frac{1}{4}$ S9 BT on open blaze. (Record, S. 75° E.)</p> <p>A ponderosa pine, 15 ins. diam., bears N. 43$\frac{1}{2}$° W., 94$\frac{1}{2}$ lks. dist., with fragmentary scribe marks visible on partially healed blaze. (Record, N. 41$\frac{1}{4}$° W., 96 lks.)</p> <p>The corner is located 0.080 chs. W. of a barbed wire fence, extending N. and S.</p>
	<p>N. 0° 27' 30" W., beginning new measurement.</p>
	<p>Ascend S. slope, along wire fence through medium timber and light undergrowth.</p>

UNION COUNTY
SURVEYOR

Date Received

3/5/13

Date Filed

3/5/13

By

Bl. G. Allen

File No.

051-2013R

Remonumentation of Certain Original Corner Points,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a mound of stone, 2 ft. base, to top, with brass cap mkd.

T 5 S R 41 E
 $\frac{1}{4}$ $\frac{S 21}{S 28}$
 1971

from which new bearing trees

A white fir, 14 ins. diam., bears N. 42° E., 57½ lks. dist., mkd. $\frac{1}{4}$ S21 ET.

A white fir, 13 ins. diam., bears S. 34½° E., 38 lks. dist., mkd. $\frac{1}{4}$ S28 ET.

Deposit corner stone and set 5 ft. steel fence post alongside iron post.

The $\frac{1}{4}$ sec. cor. of secs. 9 and 16, determined at record bearing and distance from the original bearing trees:

A ponderosa pine, 28 ins. diam., bears N. 42° E., 28 lks. dist., with axe marks visible on opened and burned blaze.

A western larch snag, 18 ins. diam., bears S. 61° E., 23 lks. dist., no marks visible.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 5 S R 41 E
 $\frac{1}{4}$ $\frac{S 9}{S 16}$
 1971

from which new bearing trees

A fir, 15 ins. diam., bears N. 13° E., 52 lks. dist., mkd. $\frac{1}{4}$ S9 ET.

A fir, 16 ins. diam., bears S. 60° E., 244 lks. dist., mkd. $\frac{1}{4}$ S16 ET.

Set 5 ft. steel fence post alongside iron post.

The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, determined at record bearing and distance from the only remaining original bearing tree:

A root hole, bears N. 45° E., 24 lks. dist., with a down and decayed pine alongside, size indeterminate, with scribe marks $\frac{1}{4}$ S visible on decayed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 2 ft. base, to top, with brass cap mkd.

UNION COUNTY
SURVEYOR

Date Received 3/5/13

Date Filed 3/5/13

By [Signature]

File No. 009-2013R

Remonumentation of Certain Original Corner Points,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS

T 5 S R 41 E
1/4
S 8 | S 9
1971

from which new bearing trees

A ponderosa pine, 10 ins. diam., bears S. 75° E.,
52 1/2 lks. dist., mkd. 1/4 S9 BT.

A ponderosa pine, 10 ins. diam., bears N. 41 1/4° W.,
96 lks. dist., mkd. 1/4 S8 BT.

Set 5 ft. steel fence post alongside iron post.

The 1/2 sec. cor. of secs. 31 and 32, determined at record
bearing and distance from the original bearing trees:

A root hole, bears S. 62° E., 26 lks. dist., with
a down fir alongside, 12 ins. diam., with scribe
marks 1/4 S BT visible on open blaze.

A root hole, bears S. 15° W., 32 lks. dist.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 5 S R 41 E
1/4
S 31 | S 32
1971

from which new bearing trees

A white fir, 18 ins. diam., bears N. 40° E., 57
lks. dist., mkd. 1/4 S32 BT.

A white fir, 12 ins. diam., bears N. 43° W., 89
lks. dist., mkd. 1/4 S31 BT.

Set 5 ft. steel fence post alongside iron post.

The cor. of secs. 29, 30, 31, and 32, determined at
record bearing and distance from the remaining original
bearing trees:

A ponderosa pine, 18 ins. diam., bears S. 19° W.,
14 lks. dist., no marks visible.

A ponderosa pine, 31 ins. diam., bears N. 89 1/2° W.,
19 lks. dist., with scribe mark T visible on
open blaze.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 5 S R 41 E
S 30 | S 29
S 31 | S 32
1971

from which new bearing trees

UNION COUNTY
SURVEYOR

Date Received 3/5/13

Date Filed 3/5/13

By N. L. G. Allen

File No. 009-2013R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by H.M. Thatcher under GLO contract Number 320, dated April 1, 1879. Surveyor General record states:

Set stone 15x13x9 for 1/4 Sec. Cor. from which:
 A Pine, 12 in. in dia. bears N45°E, 24 lks. dist.
 A Pine 8 in. in dia. bears N80°W, 20 lks. dist.

Corner brought to county standard by BLM Surveyor Stephen Albright in 1971 under special instructions dated May 3, 1957, under group number 350. Field Notes state:

The 1/4 sec. cor. of secs. 9 and 16, determined at record bearing and distance from the original bearing trees:
 A ponderosa pine, 28 ins. diam., bears N42°E, 28 lks. dist., with axe marks visible on opened and burned blaze.
 A western larch snag, 18 ins. diam., bears S61°E, 23 lks. dist., no marks visible.

At the corner point set an iron post, 28 ins. long, 2 1/2 ins. dia., 22 ins. in the ground with brass cap from which new bearing trees:
 A ponderosa pine, 10 ins. diam., bears S75°E, 52.5 lks. dist., mkd. 1/4 S9 BT.
 A ponderosa pine, 10 ins. diam., bears N41 3/4°W, 96 lks. dist., mkd 1/4 S8 BT.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" iron pipe with 3" brass cap, marked as shown below, 6 inches above ground in a collar of stone, 2 ft. dia., from which:

A 19 inch Ponderosa Pine bears South 77° East, a distance of 34.8 feet, alive and vigorous with healed blaze.

A 19 inch Ponderosa Pine bears North 40° West, a distance of 63.4 feet, alive and vigorous with healed blaze.

See Survey Number 054-2013

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pipe position:


NEW BEARING TREES:

A 19 inch Ponderosa Pine bears North 19° East, a distance of 79.00 feet, marked 1/4 S9 BT.
 A 15 inch Ponderosa Pine bears South 29° West, a distance of 50.20 feet, marked 1/4 S8 BT.

Corner falls just West of a North/South running fenceline, approximately 40 feet North of an East/West running gravel road.

I hereby certify that the corner was perpetuated on December 6, 2013.


T 5S R 41 E G-09



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffrey S. HSU
OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

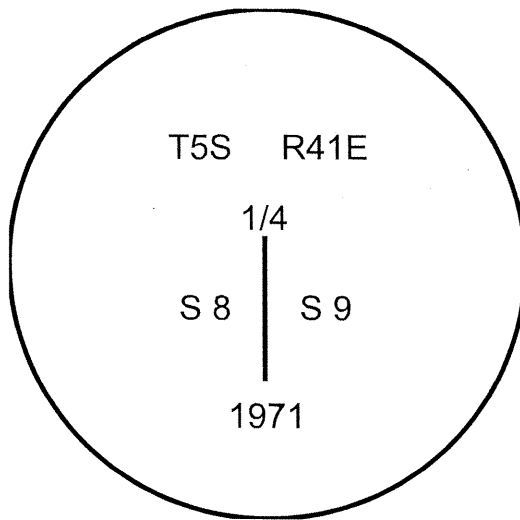

**UNION COUNTY
SURVEYOR**

Date Received 12/10/13
 Date Filed 12/10/13
 Filed By *Jeffrey S. HSU*
 File Number 446-201312

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination. The distances to the new bearing trees are to a 60d spike driven into the root crown at the right side of the bearing trees. Bearings are to a brass washer marked OPLS 83571 in the BT blaze.