

NPW .Jrm 76
Jun 1949

CADASTRAL RETRACEMENT RECORD

Index

Corner 1/4 Corner common to Section 7 & 18

Twp. 5S

R. 41E W.M.

From original G. L. O. field notes, dated 7-4-1979

EVIDENCE FOUND: 4-21

Corner Set stone 17 x 15 x 7 for 1/4 corner


none

Witness raised mound of stone at corner

Marks


From re-establishment field notes, dated

Corner



Witness

Marks

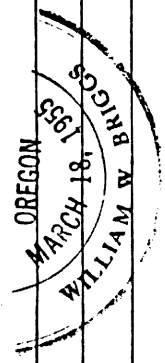

EVIDENCE FOUND:

UNION COUNTY SURVEYOR


, 19

Date Received

Date Filed

By

File No. 723-84R

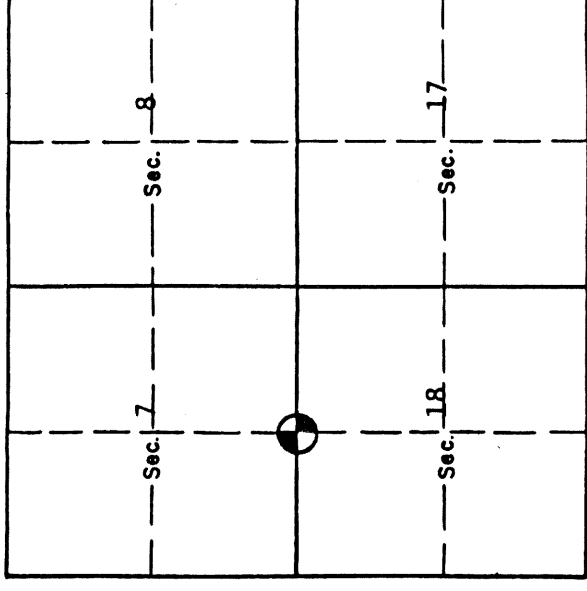

RETRACEMENT NOTES: From section corner common to Sections 7, 8, 17 & 18, ran compass and chain line west between sections 7 & 18. At 2627 intersected N & S fence line. Searched area - no evidence found. Continued compass & chain line west. Compass declination 20°30'. Set brass cap in concrete, for 1/4 cor. of Section 7 & 18, using single proportionment of distance measured electronically from section cor. 7, 8, 17 & 18 to section cor. 12, 7, 18 & 13. Set steel fence post along side cor. Blazed & scribed bearing trees, - 12" Ponderosa pine, bears S51°W., 70.0 feet 11" Ponderosa pine, bears N 9°W., 30.40 feet

Oregon License No. 3780

William W. Briggs
Signature

June 10, 1975

William W. Briggs, P.E. - Senior Vice President

Date

J-U-B ENGINEERS, Inc.

J-U-B

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	<p>A root hole, bears S. 25° E., 15 lks. dist.</p> <p>A root hole, bears S. 77° W., 25 lks. dist.</p> <p>and the remains of bearing trees mkd. by Briggs</p> <p>The rotten remains of a pine stump, size indeterminate, bear N. 49° E., 62 lks. dist., no marks.</p> <p>A ponderosa pine, 18 ins. diam., bears S. 34½° E., 39 lks. dist., with pitched over blaze.</p> <p>A ponderosa pine, 15 ins. diam., bears S. 63° W., 12 lks. dist., with scribe marks OS visible on open, upper blaze and axe marks on open, lower blaze.</p> <p>A ponderosa pine, 12 ins. diam., bears N. 45° W., 23 lks. dist., with pitched over blaze.</p> <p>and a bearing tree not of record</p> <p>A ponderosa pine, 14 ins. diam., bears N. 15½° W., 17 lks. dist., no marks visible on partially opened blaze.</p> <p>and a new bearing tree</p> <p>A ponderosa pine, 12 ins. diam., bears N. 56° E., 69 lks. dist., mkd. T5S R41E S8 BT.</p> <p>From this point, the ¼ sec. cor. of secs. 8 and 17, bears N. 89° 54' 00" E., 39.930 chs. dist, hereinbefore described.</p> <p>N. 89° 24' 30" W., bet. secs. 7 and 18.</p> <p>Ascend over gradual E. slope, through medium pine timber and grass.</p>
11.50	Slope changes to SE.
40.095	<p>Point for the ¼ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 5 S R 41 E</p> <p>S 7</p> <hr style="width: 10%; margin: 0 auto;"/> <p>¼</p> <hr style="width: 10%; margin: 0 auto;"/> <p>S 18</p> <p>1990</p> </div> <p>from which</p> <p>A ponderosa pine, 25 ins. diam., bears S. 78° W., 45 lks. dist., mkd. ¼ S18 BT.</p> <p>A ponderosa pine, 16 ins. diam., bears N. 19½° W., 41 lks. dist., mkd. ¼ S7 BT.</p>

UNION COUNTY
SURVEYOR

Date Received

3/5/13

Date Filed

3/5/13

By

[Signature]

File No.

062-2013R

490

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
	<p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p> <p>From this point, a point established as the $\frac{1}{4}$ sec. cor. of secs. 7 and 18 by William W. Briggs, Registered Professional Engineer No. 3780, in 1975, bears S. $6^{\circ} 29' 00''$ W., 0.123 chs. dist., monumented with a brass cap, 3 ins. diam., firmly set in concrete, with top mkd. $\frac{1}{4}$ S7 S18 1975 SET BY WWB RPE NO 3780. This monument was established by improper methods and is not utilized in this survey, from which bearing trees mkd. by Briggs:</p> <p style="padding-left: 40px;">A ponderosa pine, 16 ins. diam., bears S. 52° W., 106 lks. dist., with pitched over blaze.</p> <p style="padding-left: 40px;">A ponderosa pine, 16 ins. diam., bears N. 7° W., 60 lks. dist., with scribe marks S7 BT legible on pitched over blaze.</p> <p>Continue to ascend SE. slope through pine timber and grass.</p>
42.35	Top of low rimrock, bears N. and S.
54.75	Spur, slopes S.; desc. SW. slope changing to NE. slope.
80.340	The cor. of secs. 7, 12, 13, and 18 on the W. bdy. of the Tp.
	<hr/> <p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>N. $0^{\circ} 06' 00''$ E., bet. secs. 7 and 8.</p> <p>Along broken E. slope to Catherine Creek and State highway; thence asc. steep SW. slope.</p>
40.250	<p>The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, perpetuated from the original corner stone, no longer visible, and recorded by William W. Briggs, Registered Engineer No. 3780, in 1975, recorded under file No. 721-84R, monumented with a brass cap, 3 ins. diam., firmly set in concrete, with top mkd.</p> <div style="text-align: center;"> $\frac{1}{4}$ S 7 S 8 1975 BY WWB RPE 3780 </div>
	<p>from which bearing trees mkd. by Briggs</p>
	<p>A Douglas fir, 28 ins. diam., bears S. $15\frac{1}{2}^{\circ}$ E., 53 lks. dist., with pitched over blaze.</p>
	<p>A ponderosa pine, 16 ins. diam., bears S. 29° W., 9 lks. dist., with partially healed blaze.</p>
	<hr/> <p>N. $0^{\circ} 56' 30''$ E., beginning new measurement.</p>
	<p>Ascend steep, rocky SW. slope through medium timber and light undergrowth.</p>
3.30	Top of steep slope; asc. over gradual SW. slope along wire fence.

UNION COUNTY
SURVEYOR

Date Received

3/5/13

Date Filed

3/5/13

By

R. L. G. Miller

File No.

062-2013R