


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 14x12x6 for cor to secs 13,18,19 and 24
Raised stone mound at cor

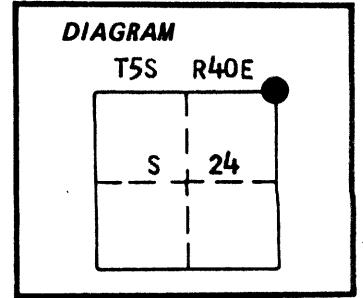

No record of subsequent remonumentation found

Description of corner evidence found:

Found a stone 14x12x6 marked 5/40 and 5/41 with 3 notches North and South in mound of stone

UNION COUNTY SURVEYOR

Date Received 6-5-86

Date Filed 6-18-86

By G. LANGRITZ DEPUTY

File No. 72-86 R

Description of monument and accessories | established to perpetuate the

original location of this corner: In place of stone, I set a 2 1/2'x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground with mound of stone 2 ft base to top of cap from which:

New BTs


- A 10 inch diameter P.Pine bears N34°E 13.70 feet marked T5S R41E S18 BT
- A 15 inch diameter P.Pine bears S28°E 97.55 feet marked T5S R41E S19 BT
- A 11 inch diameter Tamarack bears S74°W 27.92 feet marked T5S R40E S24 BT
- A 8 inch diameter Tamarack bears N40°W 45.91 feet marked T5S R40E S13 BT

Buried the original corner stone North and alongside of monument

Set steel fencepost approximately 5 feet North with 54-9 sign

Corner remonumented May 12, 1986

Witness; Rick Robinson

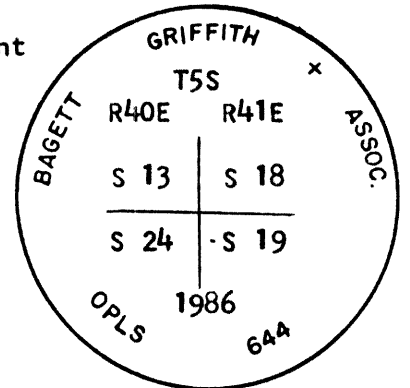

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)