

**HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200929

CORNER COMMON TO SECTIONS 16, 17, 20 AND 21

TWP. 5 S RGE. 41 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: November 4, 2009

LAT: 45 ° 7 ' 22.91039 " N

SURVEYOR: RICK ROBINSON
OPLS 2219

LONG: 117 ° 42 ' 12.47144 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 543439.066 INT FT.

E: 8923748.492 INT FT.

TYPE: GPS

THETA: 1 ° 58' 59.7504778 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998948994

ELEV: 3403.0323 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is a 3" BLM brass cap monument
Cap is marked as shown.

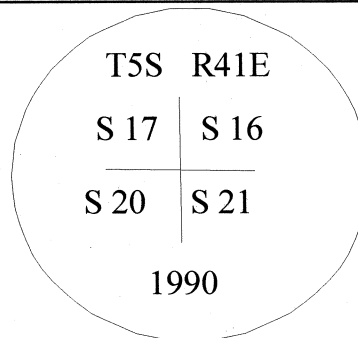

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS

A Douglas fir, 20 ins. diam., bears N. 12° E., 52 lks. dist., with fragmentary scribe marks visible on partially healed blaze. (Record, N. 13° E.)

A Douglas fir, 24 ins. diam., bears S. 62° E., 244 lks. dist., with scribe marks ¼S visible on partially healed blaze. (Record, S. 60° E.)

The corner is located 0.05 chs. S. of a barbed wire fence, extending E. and W.

S. 87° 33' 30" W., beginning new measurement.

Descend along fence line at N. edge of logged area and along creek, draining W.

40.410

Point for the cor. of secs. 8, 9, 16, and 17, at proportionate distance; there is no remaining evidence of the original corner.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 5 S	R 41 E
S 8	S 9
S 17	S 16

1990

from which

A fir, 8 ins. diam., bears N. 38° E., 53 lks. dist., mkd. T5S R41E S9 BT.

A fir, 22 ins. diam., bears S. 39° E., 63 lks. dist., mkd. T5S R41E S16 BT.

A fir, 25 ins. diam., bears S. 55° W., 38 lks. dist., mkd. T5S R41E S17 BT.

A ponderosa pine, 25 ins. diam., bears N. 56½° W., 132 lks. dist., mkd. T5S R41E S8 BT.

Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.

From this point, the cor. of secs. 16, 17, 20, and 21, bears S. 0° 53' 30" E., 79.620 chs. dist., monumented with the original unmarked slate stone, 10 x 8 x 8 ins., loosely set at the center of a stone mound, alongside find an iron pipe, 2 ins. diam., firmly set, projecting 5 ins. above ground, with metal washer mkd. CX 15 1973.

At the corner point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

UNION COUNTY
SURVEYOR

Date Received

3/5/13

Date Filed

3/5/13

By

N.A. Galun

File No.

077-2013R

476

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	<p>T 5 S R 41 E S 17 S 16 S 20 S 21 1990</p>
	<p>from which new bearing trees</p> <p>A ponderosa pine, 28 ins. diam., bears N. 40° E., 121 lks. dist., mkd. T5S R41E S16 BT.</p> <p>A ponderosa pine, 36 ins. diam., bears S. 21° E., 198 lks. dist., mkd. T5S R41E S21 BT.</p> <p>A ponderosa pine, 26 ins. diam., bears S. 89½° W., 369 lks. dist., mkd. T5S R41E S20 BT.</p> <p>A ponderosa pine, 23 ins. diam., bears N. 75½° W., 425 lks. dist., mkd. T5S R41E S17 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base, the iron pipe within, and the corner stone alongside the stainless steel post.</p> <p>The corner is located 10 lks. S. of a barbed wire fence, extending E. and W.</p> <p>A thorough search was made for the ¼ sec. cor. of secs. 16 and 17; it was not recovered.</p>
	<p>From this same point, the ¼ sec. cor. of secs. 8 and 17, bears N. 89° 48' 30" W., 40.260 chs. dist., monumented with the original slate stone, 16 x 11 x 6 ins. (record, 17 x 13 x 7 ins.), firmly set, projecting 10 ins. above ground, mkd. ¼ on the S. face, from which bearing trees not of record:</p> <p>A ponderosa pine, 15 ins. diam., bears S. 67° E., 22 lks. dist., with healed blaze.</p> <p>A ponderosa pine, 14 ins. diam., bears N. 26° W., 26 lks. dist., with healed double blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p>T 5 S R 41 E S 8 ¼ S 17 1990</p>
	<p>from which new bearing trees</p> <p>A ponderosa pine, 10 ins. diam., bears N. 14° E., 55 lks. dist., mkd. ¼ S8 BT.</p> <p>A ponderosa pine, 10 ins. diam., bears S. 55° E., 12 lks. dist., mkd. ¼ S17 BT.</p>

UNION COUNTY SURVEYOR	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>McL G Miller</i>
File No.	077-2013R