


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by H.M. Thatcher under GLO contract Number 320, dated April 1, 1879. Surveyor General record states: Set stone 24x18x8 for Cor. To Secs. 15, 16, 21 and 22. Raised Stone Mound at Cor.

T 5 S R 41 E N-13



In 1991, Philip G. Griffin conducts dependent resurvey, under BLM Special Instructions dated July 13, 1979, June 26, 1990 and Supplemental Special Instructions dated May 14, 1991, Groups No. 1000 and 1484. BLM records state:

The cor. of secs. 15, 16, 21 and 22, monumented with the original unmarked slate stone, 25 x 14 x 6 ins., loosely set at the center of an old stone mound. Alongside find a water pipe, 2 ins. diam., firmly set, projecting 3 ins. above the ground, with washer mkd. CX 18 1975.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. Diam., 22 ins. In the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

from which new bearing trees

- A ponderosa pine, 25 ins. diam., bears N. 80 1/2° E., 119 lks. dist., mkd. T5S R41E S15 BT.
- A ponderosa pine, 12 ins. diam., bears S. 43° E., 68 lks. dist., mkd. T5S R41E S22 BT.
- A ponderosa pine, 22 ins. diam., bears S. 19 3/4° W., 16 lks. dist., mkd. T5S R41E S21 BT.
- A ponderosa pine, 13 ins. diam., bears N. 68° W., 39 lks. dist., mkd. T5S R41E S16 BT.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 3" B.L.M. brass cap on 2 1/2" iron pipe, 5 ins. above the ground in a mound of stone, marked as shown, from which,

- A Pine stump bears North 82° East, a distance of 78.5 feet, with visible scribe marks.
- A 15" Ponderosa Pine bears South 41° East, a distance of 44.8 feet, with a healed blaze.
- A 24" Ponderosa Pine bears South 22° West, a distance of 10.6 feet, with visible scribe marks on a partially healed blaze.
- A 14" Ponderosa Pine bears North 67° West, a distance of 25.7 feet, with scribe marks visible on a partially healed blaze.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At the iron post position:

NEW BEARING TREE:


An 11 inch Ponderosa Pine bears North 47° East, a distance of 35.70 feet, marked T5S R41E S15 BT.

I hereby certify that the corner was perpetuated on November 6, 2009.

Witness: Jeff Hsu, Gregory T. Blackman, Jr.

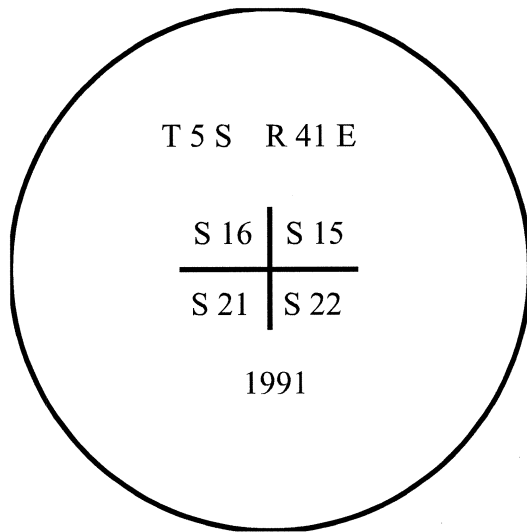

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

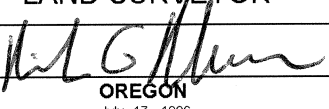

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

**UNION COUNTY
SURVEYOR**

Date Received 12/21/09

Date Filed 2/9/2010

Filed By [Signature]

File Number 006-2010R

I used a steel tape and magnetic compass in the establishment of the new accessory. I used 18° East declination, the distances are to a 60d spike driven into the root crown at the right side of the new bearing tree. Attached brass washer marked OPLS 2219 to BT blaze. Distances to existing bearing trees are to the center of the tree.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
8.00	Along W. slope.
20.450	<p>Point for the S 1/16 sec. cor. of secs. 21 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S 1/16 S 21 S 22 1991</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 16 ins. diam., bears S. 30½° E., 68 lks. dist., mkd. S 1/16 S22 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears S. 25¼° W., 34 lks. dist., mkd. S 1/16 S21 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p>
24.00	Descend NW. slope.
37.00	Descend steep N. slope.
40.900	<p>Point for the ¼ sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 5 S R 41 E S 21 S 22 1991</p> <p>from which</p> <p style="padding-left: 40px;">A larch, 12 ins. diam., bears S. 50½° E., 10 lks. dist., mkd. ¼ S22 BT.</p> <p style="padding-left: 40px;">A larch, 12 ins. diam., bears N. 59½° W., 26 lks. dist., mkd. ¼ S21 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p> <p>Descend steep N. slope to Catherine Creek; thence across creek and flat bottom land and asc. SW. slope.</p>
81.800	<p>The cor. of secs. 15, 16, 21, and 22, monumented with the original unmarked slate stone, 25 x 14 x 6 ins. (record, 24 x 18 x 8 ins.), loosely set at the center of an old stone mound. Alongside find a water pipe, 2 ins. diam., firmly set, projecting 3 ins. above ground, with washer mkd. CX 18 1975.</p> <p>At the corner point</p>

UNION COUNTY SURVEYOR	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>RLG Miner</i>
File No.	07B-2013R

461

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;"> T 5 S R 41 E S 16 S 15 S 21 S 22 1991 </p> <p>from which new bearing trees</p> <p style="padding-left: 40px;">A ponderosa pine, 25 ins. diam., bears N. 80½° E., 119 lks. dist., mkd. T5S R41E S15 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears S. 43° E., 68 lks. dist., mkd. T5S R41E S22 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 22 ins. diam., bears S. 19¾° W., 16 lks. dist., mkd. T5S R41E S21 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears N. 68° W., 39 lks. dist., mkd. T5S R41E S16 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base, the water pipe within, and the corner stone alongside the stainless steel post.</p> <p>The corner is located at the corner of wire fences, extending N. and E.</p>
<p>1.50</p> <p>39.800</p>	<p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>N. 89° 01' 30" W., bet. secs. 15 and 22.</p> <p>Ascend steep E. slope over rock ledges.</p> <p>Ridge, bears N. and S.; desc. W. slope.</p> <p>Point for the ¼ sec. cor. of secs. 15 and 22 at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> T 5 S R 41 E S 15 ¼ ——— S 22 1991 </p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears N. 33° E., 31 lks. dist., mkd. ¼ S15 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 15 ins. diam., bears S. 35° W., 44 lks. dist., mkd. ¼ S22 BT.</p>

UNION COUNTY SURVEYOR	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>W. L. Gilman</i>
File No.	C 78-2013R