

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX No. N-15

History of original corner establishment:

This corner was originally established by Henry M. Thatcher under GLO Contract No. 320, dated April 1, 1879. The Surveyor General Record states:

DIAGRAM
T5S R41E
S15
1/4—
S22
1991

Set stone 33x31x3 for 1/4 Sec. Cor. Raised stone mound at Cor.

(BLM Brass Cap)

In 1990 the Bureau of Land Management (BLM) conducted a dependent resurvey in T.5S., R.41E., W.M., under Group Nos. 1000 and 1484. This survey was executed by Philip G. Griffin, Cadastral Surveyor and commenced July 9, 1990 and was completed April 13, 1992. The following is the BLM's record for this corner:

Point for 1/4 sec. cor. of secs. 15 and 22 at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. SEE DIAGRAM from which: a ponderosa pine, 12 ins. diam., bears N33°E, 31 lks. dist., mkd. 1/4 S15 BT. A ponderosa pine, 15 ins. diam., bears S35°W, 44 lks. dist., mkd. 1/4 S22 BT. Deposit a white "DEEP-1" magnetic marker at the base and set a 6 ft. steel fence post alongside the stainless steel post. The corner is located 0.450 chs. S. of a barbed wire fence extending E. and W.

Description of Corner Evidence Found:

Found a 2 1/2" dia. stainless steel post with brass cap marked as shown in diagram, extending 4" from the ground. Monument is solid and in good condition.

A Ponderosa Pine, 12" dia., with blaze pitched over, bears N33°E, 20.46 ft. dist. (Established by BLM)

A Ponderosa Pine, 15" dia., with blaze pitched over, bears S35°W, 29.04 ft. dist. (Established by BLM)

Found no evidence of original stone.


Description of monument and accessories I established to perpetuate the original location of this corner:

No work is needed on the monument. Found a steel fence post alongside with 54-9 sign.

From Which:

Ponderosa Pine, 15" dia., bears S40 1/2°E, 39.2 ft., scribed: 1/4 S22 BT
Ponderosa Pine, 11" dia., bears N89°W, 34.7 ft., scribed: 1/4 S15 BT

Measurements to BT's taken with magnetic compass, with the declination set at 20°E and chain. Nailed Bearing Tree (54-3) signs above blaze and Land Survey Monument (54-9) signs on back of each tree as required. Painted a 6" red band above Bearing Trees signs. Set 1/2" brass disc at base of blaze stamped: "L. Miller PLS 2513".

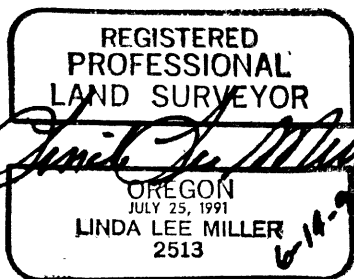

This corner maintenance was performed by:
Linda Lee Miller, PLS 2513
May 21, 1995

UNION COUNTY
SURVEYOR
Date Received 2-2-96
Date Filed 2-5-96
R. ROBINSON, DEPUTY
PLS 026-1996R

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was
filed in this office for record on the _____ day of _____
_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

461

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

| | |
|--|---|
| CHAINS | <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T 5 S R 41 E S 16 S 15 S 21 S 22 1991</p> <p>from which new bearing trees</p> <p>A ponderosa pine, 25 ins. diam., bears N. 80½° E., 119 lks. dist., mkd. T5S R41E S15 BT.</p> <p>A ponderosa pine, 12 ins. diam., bears S. 43° E., 68 lks. dist., mkd. T5S R41E S22 BT.</p> <p>A ponderosa pine, 22 ins. diam., bears S. 19½° W., 16 lks. dist., mkd. T5S R41E S21 BT.</p> <p>A ponderosa pine, 13 ins. diam., bears N. 68° W., 39 lks. dist., mkd. T5S R41E S16 BT.</p> |
| <p>UNION COUNTY SURVEYOR</p> <p>Date Received <u>3/5/13</u></p> <p>Date Filed <u>3/5/13</u></p> <p>By <u>M. G. Alon</u></p> <p>File No. <u>079-2013R</u></p> | <p>Deposit a white "DEEP-1" magnetic marker at the base, the water pipe within, and the corner stone alongside the stainless steel post.</p> <p>The corner is located at the corner of wire fences, extending N. and E.</p> |
| 1.50 | <p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>N. 89° 01' 30" W., bet. secs. 15 and 22.</p> <p>Ascend steep E. slope over rock ledges.</p> <p>Ridge, bears N. and S.; desc. W. slope.</p> |
| 39.800 | <p>Point for the ¼ sec. cor. of secs. 15 and 22 at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 5 S R 41 E S 15 ¼ ——— S 22 1991</p> <p>from which</p> <p>A ponderosa pine, 12 ins. diam., bears N. 33° E., 31 lks. dist., mkd. ¼ S15 BT.</p> <p>A ponderosa pine, 15 ins. diam., bears S. 35° W., 44 lks. dist., mkd. ¼ S22 BT.</p> |