


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner not previously established.

T 5S R 41 E O-11

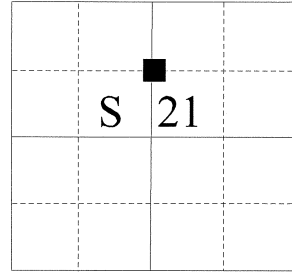

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None

See Minor Partition Number 20100001T

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron rod with 2 1/2" Aluminum Cap marked as shown, 28 ins. in the ground, from which:

**BEARING TREES:**

A 9 in. Ponderosa Pine bears North 20° East, a distance of 19.70 feet, marked CN 1/16 S21 BT.

a 24 in. Ponderosa Pine bears South 69° East, a distance of 42.38 feet, marked CN 1/16 S21 BT.


I hereby certify that the corner was set on November 30, 2009.

Witness: Jeff Hsu, Gregory T. Blackman, Jr.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2010

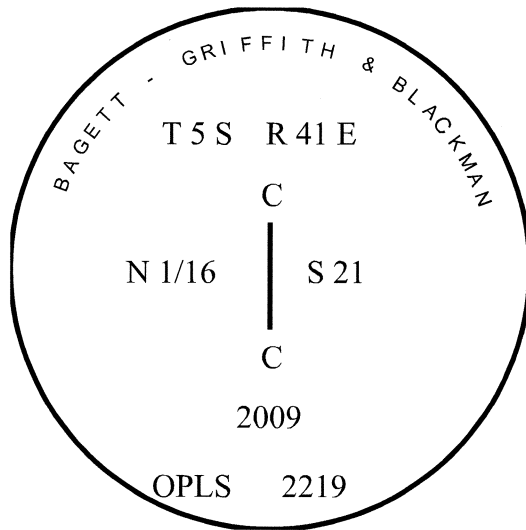

**UNION COUNTY  
SURVEYOR**

Date Received 2/2/2010

Date Filed 2/9/2010

Filed By Gregory T. Blackman, Jr.

File Number 010 - 2010R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the root crown at the right side of the bearing trees. Attached brass washer marked OPLS 2219 to BT blaze.