


R-1

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

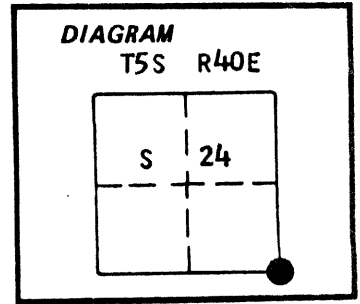

Set stone 17x13x11 for cor to secs 19,24,25 and 30
Raised stone mound at cor

No record of subsequent remonumentation found
Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR	
Date Received	<u>6-5-86</u>
Date Filed	<u>6-18-86</u>
By	<u>G. LANGUITZ, DEPUTY</u>
File No.	<u>58-86 R</u>

See map of survey dated June, 1986


Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground with mound of stone 2 ft. base to top of cap from which:

New BTs

- A 12 inch diameter Red Fir bears N19°E 33.09 feet marked T5S R41E S19 BT
- A 8 inch diameter White Fir bears S30°E 26.22 feet marked T5S R41E S30 BT
- A 19 inch diameter Red Fir bears S34°W 47.29 feet marked T5S R40E S25 BT on single blaze
- A 10 inch diameter Tamarack bears N2°W 34.27 feet marked T5S R40E S24 BT

Set steel fencepost approximately 5 feet North with 54-9 sign

Corner set May 13, 1986
Witnesses: Greg Blackman and Rick Robinson

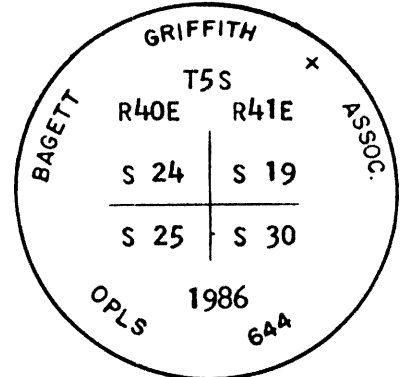

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL)

(DEPUTY)

426

Dependent Resurvey of a Portion of the West Boundary,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS
40.200

The cor. of secs. 19, 24, 25, and 30 reestablished by proportionate measurement by Duane I. Griffith, Registered Surveyor No. 644, in 1986, recorded under file No. 58-86R; there is no remaining evidence of the original corner, therefore, this position is accepted as the corner, monumented with an aluminum post, 2½ ins. diam., firmly set flush with the ground, and in a collar of stone, with aluminum cap mkd.

BAGETT GRIFFITH ASSOC
T 5 S
R 40 E R 41 E
S 24 | S 19
S 25 | S 30
1986
OPLS 644

from which bearing trees mkd. by Griffith

A fir, 14 ins. diam., bears N. 19° E., 50 lks. dist., with fragmentary scribe marks on partially healed double blaze.

A fir, 9 ins. diam., bears S. 28° E., 40 lks. dist., with healed double blaze.

A fir, 20 ins. diam., bears S. 29° W., 71 lks. dist., with pitch covered blaze.

A larch, 12 ins. diam., bears N. 3° W., 52 lks. dist., with fragmentary scribe marks on partially healed double blaze.

and a new bearing tree

A ponderosa pine, 10 ins. diam., bears S. 60° E., 69 lks. dist., mkd. T5S R41E S30 BT.

A steel fence post is set alongside the aluminum post.

N. 0° 11' 30" E., bet. secs. 19 and 24.

Along broken E. slope, through heavy timber and light undergrowth along wire fence.

0.15 Barbed wire fence, extends E. and W.

14.00 Ascend SE. slope.

20.100 Point for the S 1/16 sec. cor. of secs. 19 and 24.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

S 1/16
S 24 | S 19
1992

UNION COUNTY
SURVEYOR

Date Received

3/5/13

Date Filed

3/5/13

By

Neil G. Munn

File No.

100-2013R