

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Henry M. Thatcher under GLO Contract number 320 dated April 1, 1879. GLO record states; Set fir post 4 1/2' long 4 in. Dia for 1/4 sec cor from which; A Pine 8 in. in dia. bears N32°E 30 lks dist. A Pine 22 in. in dia. bears S24°W 24 lks dist.

B.L.M. records states point for 1/4 sec. cor. of secs. 19 and 30, at proportionate distance; there were no remaining evidence of the original corner. Set a stainless steel post, 28 ins long. 2 1/2" diam, 24 ins in the ground, and in a collar of stone, with a brass cap marked, from which;

A fir, 24 ins. diam., bears N.10° E., 119 lks. dist., mkd. 1/4 S30 BT.
A fir, 27 ins. diam., bears S. 56° E., 14 lks dist., mkd. 1/4 S30 BT.

DESCRIPTION OF CORNER EVIDENCE FOUND:
Found corner set by B.L.M.

Found a SE BT stump at record bearing and distance.
Found a NE BT stump at record bearing and distance.

See Survey Number 035-1998

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:
Found corner monument set by B.L.M. as described above.



NEW BEARING TREES:

A 17" Tamarack bears N 12° E, a distance of 124.95 feet, marked 1/4 S19 BT.
A 18" Tamarack bears S 70° E, a distance of 250.93 feet, marked XX BT.
A 14" Tamarack bears S 40° W, a distance of 165.62 feet, marked 1/4 S30 BT.
A 13" Tamarack bears N 56° W, a distance of 199.17 feet, marked X BT.

I hereby certify that the corner was monumented on September 3, 1998
Witness: Norbert Volny.

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219
Renewal Date December 31, 1998

UNION COUNTY
SURVEYOR
Date Received 9/17/98
Date Filed 9/26/98
Filed By *Guy J. Blum*
File Number 078-1998R

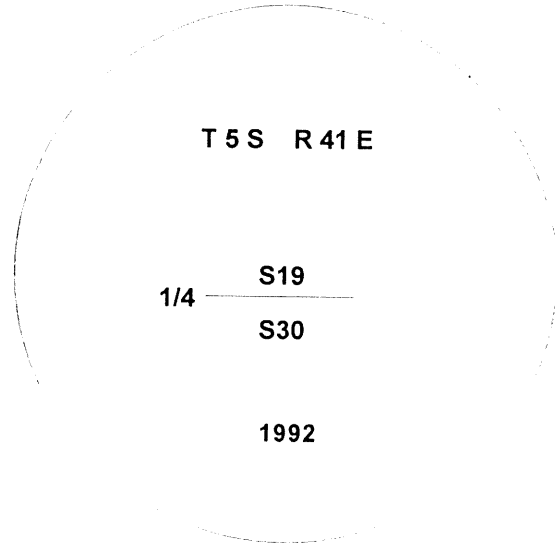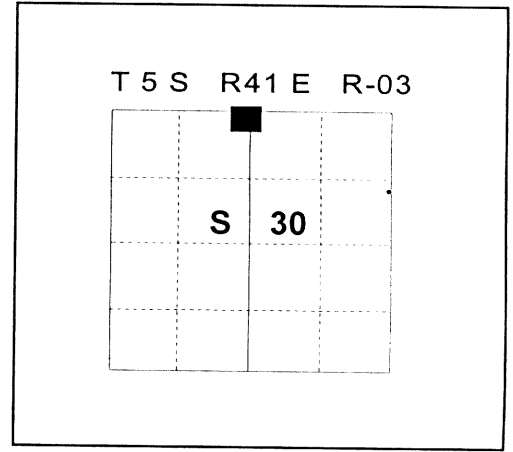

I used a steel tape and compass with 17° E magnetic declination in the establishment of the new accessories. The distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 2219 to the BT blaze.

488

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
67.50	Top of ascent; desc. gradual W. slope.
80.060	The cor. of secs. 19, 20, 29, and 30.
<hr/>	
S. 89° 38' 00" W., bet. secs. 19 and 30.	
Descend over gradual W. slope, through medium timber and light undergrowth to Milk Creek; thence asc. E. slope.	
40.085	<p>Point for the ¼ sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 5 S R 41 E</p> <p>S 19</p> <hr style="width: 50px; margin: 0 auto;"/> <p>¼ S 30</p> <p>1992</p> </div> <p>from which</p> <p style="margin-left: 40px;">A fir, 24 ins. diam., bears N. 10° E., 119 lks. dist., mkd. ¼ S19 BT.</p> <p style="margin-left: 40px;">A fir, 27 ins. diam., bears S. 56° E., 14 lks. dist., mkd. ¼ S30 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p>
Ascend over NE. slope.	
78.50	Track road, 15 lks. wide, bears NE. and SW.
79.65	Abandoned dirt road, 20 lks. wide, bears N. and S.; asc. E. slope.
80.30	Barbed wire fence, extends N. and S.
80.720	The cor. of secs. 19, 24, 25, and 30 on the W. bdy. of the Tp.
<hr/>	
<p>From the cor. of secs. 7, 8, 17, and 18, perpetuated and recorded by William W. Briggs, Registered Professional Engineer No. 3780, in 1975, recorded under file No. 724-84R, monumented with a brass cap, 3 ins. diam., firmly set in concrete flush with the ground surface, in a collar of stone, with top mkd.</p> <div style="text-align: center;"> <p>T 5 S R 41 E</p> <p>S 7 S 8</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S 18 S 17</p> <p>1975</p> <p>SET BY WWB RPE NO 3780</p> </div> <p>from which the remains of the original bearing trees</p> <p style="margin-left: 40px;">A rotten pine stump, size indeterminate, bears N. 28° E., 93 lks. dist., no marks.</p>	

UNION COUNTY SURVEYOR	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>RLG</i>
File No.	101-7013R