

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX NO. R-19

History of original corner establishment:

DIAGRAM

1879

T5S R41E

This corner was originally established by Henry M. Thatcher under GLO Contract No. 320, dated April 1, 1879. The Surveyor General Record states:

1/4 S23
S26

Set stone 17x13x3 for 1/4 sec. cor. Raised stone mound at cor. (No calls to BT's).

1991

1991

In 1990, the Bureau of Land Management (BLM) conducted a Dependent resurvey in T.05S., R41E., W.M., under Group Nos. 1000 and 1484. This survey was executed by Philip G. Griffin, Cadastral Surveyor, and commenced by July 9, 1990 and was completed April 13, 1992. The following is the BLM's record for this corner.

The 1/4 sec. cor. of Secs. 23 and 26, determined at the center of an ancient stone mound, with original slate stone, 17x13x5" (record 17x13x3"), loose alongside, with illegible chisel marks. At the point set a stainless steel post, 28" long, 2 1/2" dia., 22" in the ground, and in a mound of stone, 3 ft., base, to top, with brass cap marked, SEE DIAGRAM, from which new Bearing Trees"


- A Ponderosa Pine, 18" dia., bears S13 1/4°E, 35 lks., dist., marked: 1/4 S26 BT.
- A Larch, 15" dia., bears N02 1/2°W, 49 lks., dist., marked: 1/4 S23 BT.

Description of Corner Evidence Found:

Found a 2 1/2" dia., stainless steel post with brass cap marked as shown in DIAGRAM, extending 6" from the ground in a mound of stone. Monument is solid and in good condition.

A Western Larch, 15" dia., bears N02°33'57"W, 32.22 ft. dist., scribing not visible. (Established by BLM)

A Ponderosa Pine, 19" dia., bears S13°02'17"E, 22.00 ft. dist., scribing not visible. (Established by BLM).

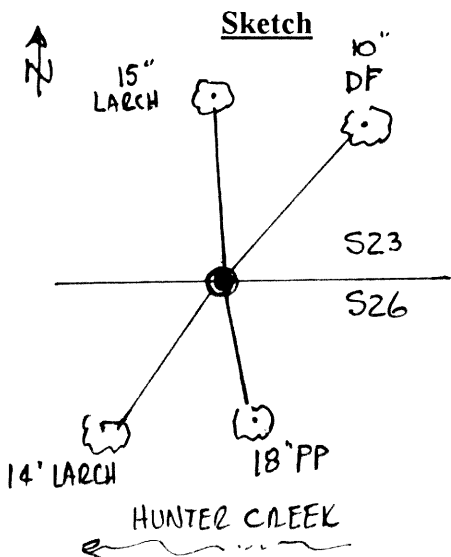

Monument Detail



Location/Comments

Mean Magnetic Declination 20° East

SURVEYOR

REGISTERED PROFESSIONAL LAND SURVEYOR <i>Linda Lee Miller</i> OREGON JULY 25, 1991 LINDA LEE MILLER 2513 1-10-96 Renewal Date 12-31-96

UNION COUNTY

UNION COUNTY SURVEYOR Date Received <u>2-2-96</u> Date Filed <u>2-5-96</u> R. ROBINSON, DEPUTY File No. <u>009-1996R</u>

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX NO. R-19

Description of monument and accessories I established to perpetuate the original location of this corner:

A Douglas Fir, 10" dia., N40°48'E, 33.9 ft., scribed: 1/4 S23 BT.
Set 1/2" brass disc at base of blaze stamped: "L. MILLER PLS 2513".

A Western Larch, 14" dia., S41°15'W, 29.0 ft., scribed: 1/4 S26 BT.
Set 1/2" brass disc at base of blaze stamped: "L. MILLER PLS 2513".


Measurements to BT's taken with total station and chain with bearings based on the survey control network. Nailed Bearing Tree (54-3) signs above blaze and Land Survey Monument (54-9) signs on back of each tree. Set steel fence post with Land Survey Monument (54-9) sign 3' from the monument. Painted 6" red band above Bearing Tree signs.

This monumentation performed by:
Linda Lee Miller, PLS 2513
July 15, 1994

Sketch

Monument Detail

Location/Comments

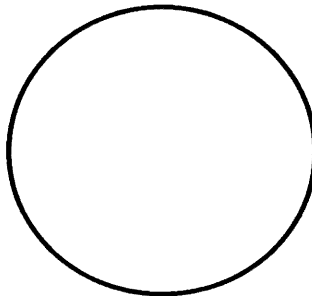

Mean Magnetic
Declination 20° East

PAGE 2 OF 2

SURVEYOR

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>Linda Lee Miller</i>
OREGON JULY 25, 1991 LINDA LEE MILLER 2513 1-10-96
Renewal Date 12-31-96

UNION COUNTY

UNION COUNTY REGISTERED
Date Received 2-2-96
Date Filed 2-5-96
By R. ROBINSON, DEPUTY
File No. 009-1996 R

444

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
19.40	Scout Creek, 40 lks. wide, course N. 75° W. from S. 20° E. Along N. slope.
23.05	Scout Creek, 30 lks. wide, course S. 20° W. from N. 60° E.
23.60	Abandoned road, 20 lks. wide, bears N. and S.
23.70	Ascend E. slope.
24.205	<p>The ¼ sec. cor. of secs. 23 and 26, determined at the center of an ancient stone mound, with original slate stone, 17 x 13 x 5 ins. (record, 17 x 13 x 3 ins.), loose alongside, with illegible chisel marks.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 5 S R 41 E</p> <p>S 23</p> <hr style="width: 20%; margin: 0 auto;"/> <p>¼</p> <p>S 26</p> <p>1991</p> </div> <p>from which new bearing trees</p> <p>A ponderosa pine, 18 ins. diam., bears S. 13¼° E., 35 lks. dist., mkd. ¼ S26 BT.</p> <p>A larch, 15 ins. diam., bears N. 2½° W., 49 lks. dist., mkd. ¼ S23 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base, the corner stone alongside, and set a 6 ft. steel fence post alongside the stainless steel post.</p>
	N. 89° 46' 00" W., beginning new measurement.
	Ascend gradual SE. slope through medium timber and light undergrowth.
7.50	Spur, slopes S.; desc. SW. slope to Scout Creek; thence asc. NE. slope.
32.20	Ridge, bears N. 30° W. and S. 30° E.; desc. W. slope.
39.125	The cor. of secs. 22, 23, 26, and 27.
	N. 0° 23' 00" E., bet. secs. 22 and 23.
	Along rocky W. slope.
	Descend steep N. slope.
	Scout Creek, 20 lks. wide, course N. 50° W.

UNION COUNTY SURVEYOR	
Date Received	3/5/13 7-50
Date Filed	18.60 3/5/13
By	<i>W. L. G. Allen</i>
File No.	111-2013R