


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

R-23

1/4 Section Corner of Sections 25 & 36, T.5S., R.41E., W.M.

History of original corner establishment:

The corner was originally established by **Henry M. Thatcher**, U. S. Deputy Surveyor, Contract Number 320, during **1879**. His record states: "Set stone 13 x 9 x 7 for 1/4 Sec. Cor. Raised stone mound at Cor."



1991, Philip G. Griffin, Cadastral Surveyor, BLM, conducted a dependent resurvey in this township and remonuments this corner from original evidence, his record states:

"The 1/4 sec. cor. of secs. 24 and 25, monumented with the original unmarked basalt stone, 13 x 8 x 6 ins. (record 13 x 9 x 7 ins.), firmly set, projecting 4 ins. above ground.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd." (as shown in the diagram). "From which new bearing trees

- A ponderosa pine , 22 ins. diam., bears N. 15° E., 26 lks. dist., mkd. 1/4 S24 BT.
- A Douglas fir, 15 ins. diam., bears S. 36° E., 39 lks. dist., mkd. 1/4 S25 BT.

Deposit a white "Deep-1" magnetic marker at the base and the corner stone alongside the stainless steel post."

Description of corner evidence found:

Found a 2 1/2" stainless steel pipe & brass cap, 6 ins. above ground, in mound of stone, marked as shown in the diagram above, from which:

BLM 1991 Bearing Trees:

- A ponderosa pine , 22 ins. diam., bears N. 15° E., 17.2 ft. dist., mkd. "1/4 S24 BT" visible in partially healed blaze.
- A Douglas fir, 15 ins. diam., bears S. 36° E., 25.7 ft. dist., mkd. "1/4 S25 BT" visible in partially healed blaze.

Description of monument and accessories I established to perpetuate the original location of this corner:

From the brass cap, I established the following references:

Set a 1/2 ins. diam. by 24 ins. long, rebar, 20 ins. in the ground, S. 27° W., 152.8 feet, with brass washer mkd. LS 2211, RM 2, wire to the rebar, with a collar of stone.

Set a 1/2 ins. diam. by 24 ins. long, rebar, 23 ins. in the ground, N. 85° W., 161.6 feet, with brass washer mkd. LS 2211, RM 1, wire to the rebar, with a collar of stone, (note: RM 2 bears S. 31° E., 175.8 feet).


I set steel post with a Land Survey Monument & a Property Boundary sign, East on line, 3.4 feet from the monument. Also I set a steel post with a Land Survey Monument sign, South on line, 2.5 feet, from the monument.

I hereby certify that the above corner was perpetuated by me and my crew on August 28, 1997.

Compass declination used 18 1/2° East.
See also, filed survey plat.

Witnessed by crew member: Roanna K. Ruston

8/5/98
8/29/98
R. ROBINSON, DEPUTY
052-1998R

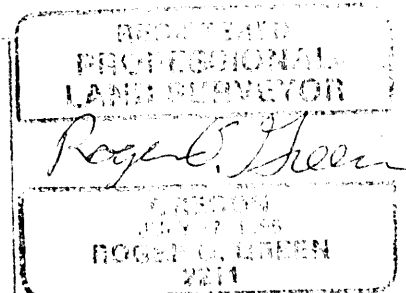

Current registration period ends 6-30-99.

434

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
	Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post. Ascend steep NE. slope.
37.00	Rimrock, extends N. into prominent cliff, facing E.
39.20	Rimrock, 10 ft. high, bears NW. and SE.
40.210	The ¼ sec. cor. of secs. 24 and 25, monumented with the original unmarked basalt stone, 13 x 8 x 6 ins. (record, 13 x 9 x 7 ins.), firmly set, projecting 4 ins. above ground. At the corner point Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T 5 S R 41 E S 24 ¼ ————— S 25 1991 </div> from which new bearing trees A ponderosa pine, 22 ins. diam., bears N. 15° E., 26 lks. dist., mkd. ¼ S24 BT. A Douglas fir, 15 ins. diam., bears S. 36° E., 39 lks. dist., mkd. ¼ S25 BT. Deposit a white "DEEP-1" magnetic marker at the base and the corner stone alongside the stainless steel post.
	S. 88° 04' 30" W., beginning new measurement.
	Ascend NE. slope.
1.65	Top of ascent, over rolling ridgetop through logging slash.
10.00	Descend broken W. slope.
14.00	Ravine, drains S.
19.510	Point for the W 1/16 sec. cor. of secs. 24 and 25.
	Cemented a brass tablet, 3¼ ins. diam., 3½ in. stem, in a drill hole in solid bedrock, with top mkd.
	<div style="text-align: center;"> S 24 W 1/16 ————— S 25 1991 </div>
	from which
	A ponderosa pine, 11 ins. diam., bears S. 46° E., 64 lks. dist., mkd. W 1/16 S25 BT.

UNION COUNTY SURVEYOR	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>[Signature]</i>
File No.	116-2013R