

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

None

No record of subsequent monumentation found in Union County survey records

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Survey Number 035-1998

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At the position determined by survey I set a 2½"x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which;

NEW BEARING TREES:


A 14" Ponderosa Pine bears N 64° E, a distance of 16.08 feet, marked S 1/16 S29 BT.

A 9" White Fir bears S 1° W, a distance of 79.74 feet, marked S 1/16 S30 BT.

I hereby certify that the corner was monumented on September 15, 1998
Witness: Norbert Volny and Greg Engelgau

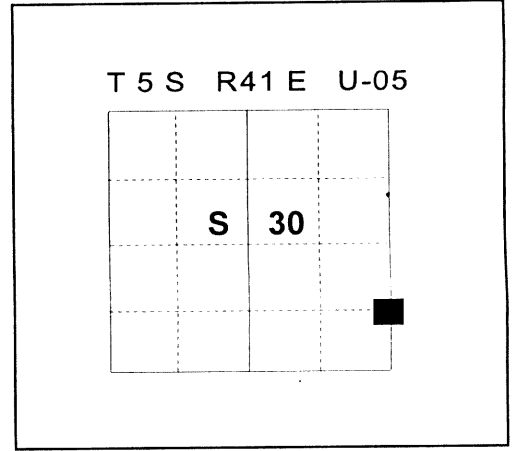

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Rick G Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219
Renewal Date December 31, 1998

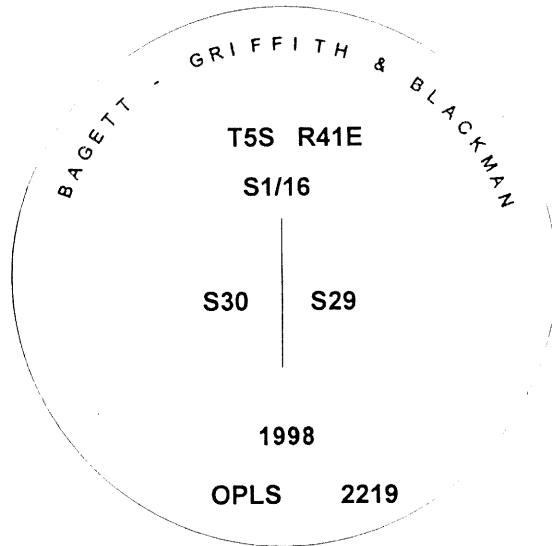

I used a steel tape and compass with 17° E magnetic declination in the establishment of the new accessories. The distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 2219 to the BT blaze.

**UNION COUNTY
SURVEYOR**
Date Received 9/17/98
Date Filed 9/26/98
Filed By *Greg T. Daw*
File Number 075-1998R