

104-69A

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original survey by General Land Office contract survey.


The original notes state.

Western Larch 12" in diam bears N 61°W 8 lks dist marked T5S R41 E S25BT;

Black pine 8" in diam bears S60°W 5 lks dist. marked T5S R41E S36BT;


Black pine 12" in diam bears S60°E 5 lks dist marked T5S R42E S31BT;

A western larch 6" in diam bears N35°E 22 lks dist marked T5S R42E.

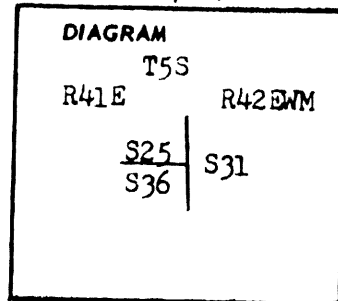

Description of corner evidence found:

Found a slab from a black pine with scribe mark visible. ( T5S R41E S36BT;  
At N61°W a a 20" tamarack in good condition and with scribe visible.  
At N35°E found a down log with partial scribe visible.

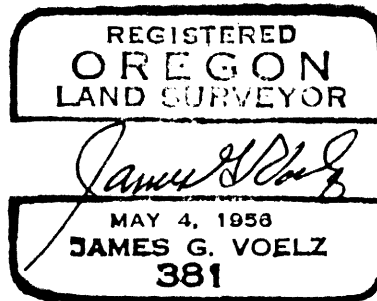

Description of monument and accessories I established to perpetuate the original location of this corner

At the position of the corner I set a 2" galvanized pipe 30" long with a bronze cap on top and 8" plate welded to bottom. The pipe set to a depth of 24" and back filled with tamped soil.

I stamped the disk.

COR  
T5S  
R41E R42E  
S25 | S31  
S36 |  
ORE LIC 381  
1969

From the monument the original bearing tree is;  
A tamarack 20" in diam bears N61°W 8 lks dist.  
I set the following new bearing trees;  
A whitefir 6" in diam bears S50°W 16.1 feet dist marked T5S R41E S36BT;  
A white fir 11" in diam bears S45°E 19 feet dist marked T5S R42E S31BT;  
( distance measured to center of trees and marked with a scribe)  
I set a USFS national Forest sign 54-4 and placed USFS bearing tree signs on the bearing trees shoulder high facing the corner.

Office of...County...surveyor..... County of.....Union.....  
State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the 8 day of Oct. 1969, at 9 o'clock P.m., (signed)  
.....County...surveyor..... by *James G. Voelz*  
(COUNTY OFFICIAL) (DEPUTY)


UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
By	_____
File No.	726-84R

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

Section Corner of Section 25 & 36 only, T.5S., R.41E., W.M.

**History of original corner establishment:**

The corner was originally established by **Henry M. Thatcher**, U. S. Deputy Surveyor, Contract Number 320, during **1879**. His record states:  
"Set Tamarack Post 4 ft. long 4 ins. in dia. for Cor. to Secs. 25, 36, 30, & 31.

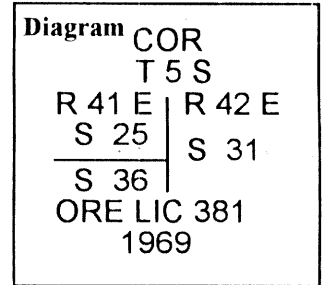

From which

- A Tamarack 12 ins. in dia. bears N 61° W, 8 lks. dist.
- A Tamarack 6 ins. in dia. bears N 35° E, 32 lks. dist.
- A Black Pine 12 ins. in dia. bears S 60° E, 5 lks. dist.
- A Black Pine 8 ins. in dia. bears S 60° W, 5 lks. dist."

**1899, James P. Currin**, U. S. Deputy Surveyor, Contract Number 693, while retracing the East boundary of T5S, R41E, his record states:

"To sec. cor. sec. 25-36-30 and 31. a tamarack post with witness trees as described by Surveyor General. And while subdividing T5S, R42E, his record states:

"Intersect W. bdy of tp. 196 lks N. of cor to sec. 25-30-31 and 36. Found said cor. a post 4 ft. long 4 ins. square marked and witnessed as described by the Surveyor General: Destroyed "S. 30." from witness tree N.E. of old corner."

**1969, James G. Voelz**, (County Surveyor), remonuments this corner from found original bearing trees. His record states:

"Found a slab from a black pine with scribe mark visible. ( T5S R41E S36BT;  
At N61°W a 20" tamarack in good condition and with scribe visible.  
At N35°E found a down log with partial scribe visible."

Established:

"At the position of the corner I set 2" galvanized pipe 30" long with a bronze cap on top and 8" plate welded to bottom. The pipe set to a depth of 24" and back filled with tamped soil.

I stamped the disk ." (As shown in the above diagram.)

"From the monument the original bearing tree is;

A tamarack 20" in diam bears N61°W 8 lks dist.

I set the following new bearing trees;

A whitefir 6" in diam bears S50°W 16.1 feet dist marked T5S R41E S36BT;

A white fir 11" in diam bears S45°E 19 feet dist marked T5S R42E S31BT;

( distance measured to center of trees and marked with a scribe )"

**1991, Philip G. Griffin**, Cadastral Surveyor, BLM, conducted a dependent resurvey in this township. his record states:

"The sec. cor. of sec. 25 and 36 only, perpetuated and recorded by James G. Voelz, Oregon Registered Land Surveyor No. 381, in 1969, recorded under file No. 726-84R, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd." (As shown in the diagram.)

"from which remains of original bearing trees

A root hole, bears S. 60° E., 5 lks. dist., with loose blaze alongside, with scribe mark S legible.

A root hole, bears S. 60° W., 5 lks. dist., with loose wood alongside, with old blaze and axe marks.

A larch, 24 ins. diam., bears N. 61° W., 8 lks. dist., with scribe marks S2 legible on opened blaze.

and bearing trees mkd. by Voelz

A fir, 15 ins. diam., bears S. 42° E., 29 lks. dist., with healed double blaze.

A fir, 8 ins. diam., bears S. 50° W., 24 lks. dist., with healed double blaze.

and a new bearing tree

A lodgepole pine, 14 ins. diam., bears S. 74 1/2° W., 64 lks. dist., mkd. T5S R41E S36 BT."

**Continued on page 2.**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

V-25

Section Corner of Section 25 & 36 only, T.5S., R.41E., W.M.

Continued from page 1.

**Description of corner evidence found:**

The sec. cor. of sec. 25 and 36 only, perpetuated and recorded by James G. Voelz, Oregon Registered Land Surveyor No. 381, in 1969, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap marked as shown in the diagram at the top of page 1.

from which remains of original bearing trees

A larch, 24 ins. diam., bears N. 61° W., 5.8 ft. dist. (record 5.3 ft.), with scribe marks "S2" legible on opened blaze.

and bearing trees mkd. by Voelz

A fir, 15 ins. diam., bears S. 42° E., 18.8 ft. dist. (record 19.1 ft.), with scribing visible in partially healed double blaze.

A fir, 8 ins. diam., bears S. 50° W., 15.8 ft. dist., with healed double blaze.

and a bearing tree mkd. by Griffin

A lodgepole pine, 14 ins. diam., bears S. 74 1/2° W., 42.8 ft. dist. (record 42.2 ft.), marked "T5S R41E S36 BT."

**Description of monument and accessories I established to perpetuate the original location of this corner:**

From the brass cap, I established the following references:

Set a 1/2 ins. diam. by 24 ins. long, rebar, 18 ins. in the ground, S. 31° 00' E., 209.2 feet, with brass washer mkd. LS 2211, RM 1, wire to the rebar, with a collar of stone.

Set a 1/2 ins. diam. by 24 ins. long, rebar, 18 ins. in the ground, N. 71° 45' E., 324.4 feet, with brass washer mkd. LS 2211, RM 2, wire to the rebar, with a collar of stone, (note: RM 1 bears N. 35° 30' E., 344.8 feet).

I set steel post with a Land Survey Monument & a Property Boundary sign, West on line, 2.75 feet from the monument. Also I set a steel post with a Land Survey Monument sign, North on line, 2.9 feet, from the monument.


I hereby certify that the above corner was perpetuated by me and my crew on September 3, 1997.

Compass declination used 18 1/2° East.

See also, filed survey plat.

Witnessed by crew member: Roanna K. Ruston

8/5/98
8/29/98
R. ROBINSON, Deputy
057-1998R

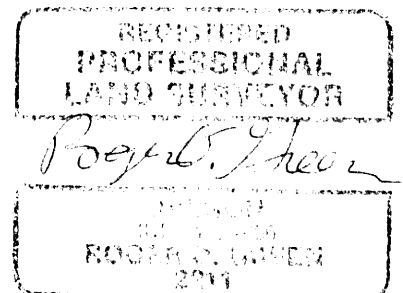

Current registration period ends 6-30-99.

3007 2 1999

Dependent Resurvey of a Portion of the East Boundary,  
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	<p>A fir, 26 ins. diam., bears S. 77° W., 30 lks. dist., with scribe mark S legible on rotten blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td colspan="2">T 5 S</td></tr> <tr><td>R 41 E</td><td>R 42 E</td></tr> <tr><td>¼ S 36</td><td></td></tr> <tr><td colspan="2">1991</td></tr> </table> </div> <p>from which a new bearing tree</p> <p>A larch, 15 ins. diam., bears N. 75¼° W., 31 lks. dist., mkd. ¼ S36 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base and set a 6 ft. steel fence post alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>North, beginning new measurement.</p> <p>1.00 Track road, 15 lks. wide, bears N. 10° W. and S. 10° E.; desc. gradually over broken NW. slope.</p> <p>38.00 Graveled road, 30 lks. wide, bears NE. and SW.</p> <p>40.595 The cor. of secs. 25 and 36 only, perpetuated and recorded by James G. Voelz, Oregon Registered Land Surveyor No. 381, in 1969, recorded under file No. 726-84R, monumented with an iron post, 2½ ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td colspan="2">COR</td></tr> <tr><td colspan="2">T 5 S</td></tr> <tr><td>R 41 E</td><td>R 42 E</td></tr> <tr><td>S 25</td><td></td></tr> <tr><td colspan="2">S 31</td></tr> <tr><td>S 36</td><td></td></tr> <tr><td colspan="2">ORE LIC 381</td></tr> <tr><td colspan="2">1969</td></tr> </table> </div> <p>from which remains of original bearing trees</p> <p>A root hole, bears S. 60° E., 5 lks. dist., with loose blaze alongside, with scribe mark S legible.</p> <p>A root hole, bears S. 60° W., 5 lks. dist., with loose wood alongside, with old blaze and axe marks.</p> <p>A larch, 24 ins. diam., bears N. 61° W., 8 lks. dist., with scribe marks S2 legible on opened blaze.</p> <p>and bearing trees mkd. by Voelz</p> <p>A fir, 15 ins. diam., bears S. 42° E., 29 lks. dist., with healed double blaze.</p>	T 5 S		R 41 E	R 42 E	¼ S 36		1991		COR		T 5 S		R 41 E	R 42 E	S 25		S 31		S 36		ORE LIC 381		1969	
T 5 S																									
R 41 E	R 42 E																								
¼ S 36																									
1991																									
COR																									
T 5 S																									
R 41 E	R 42 E																								
S 25																									
S 31																									
S 36																									
ORE LIC 381																									
1969																									

<b>UNION COUNTY SURVEYOR</b>	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>M. G. [Signature]</i>
File No.	148-201312

Dependent Resurvey of a Portion of the East Boundary,  
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS																
	<p>A fir, 8 ins. diam., bears S. 50° W., 24 lks. dist., with healed double blaze.</p> <p>and a new bearing tree</p> <p>A lodgepole pine, 14 ins. diam., bears S. 74½° W., 64 lks. dist., mkd. T5S R41E S36 BT.</p>															
<p>1.980</p>	<p>N. 0° 18' 00" W., on the E. bdy. of sec. 25.</p> <p>Descend gradually over W. slope through moderate timber and light undergrowth.</p> <p>From this point, the original closing cor. of secs. 30 and 31, T. 5 S., R. 42 E., bears East, 0.053 chs. dist., determined at record bearing and distance from the remains of the original bearing trees:</p> <p>A larch, 13 ins. diam., bears N. 67° E., 31 lks. dist., with scribe marks 30 legible on opened blaze.</p> <p>A root wad, bears S. 56° E., 48 lks. dist., with larch log alongside, 10 ins. diam., with fragmentary scribe marks legible on partially healed, rotting blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">T 5 S</td> <td style="border-left: 1px solid black; padding-left: 5px;">T 5 S</td> <td></td> </tr> <tr> <td style="text-align: center;">R 41 E</td> <td style="border-left: 1px solid black; padding-left: 5px;">S 30</td> <td></td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; padding-left: 5px;">S 31</td> <td style="text-align: center;">CC</td> </tr> <tr> <td style="text-align: center;">S 25</td> <td style="border-left: 1px solid black; padding-left: 5px;">R 42 E</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">1991</td> </tr> </table> <p>from which a new bearing tree</p> <p>A larch, 22 ins. diam., bears S. 37° E., 61 lks. dist., mkd. T5S R42E S31 CC BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base and set a 6 ft. steel fence post alongside the stainless steel post.</p>	T 5 S	T 5 S		R 41 E	S 30			S 31	CC	S 25	R 42 E				1991
T 5 S	T 5 S															
R 41 E	S 30															
	S 31	CC														
S 25	R 42 E															
		1991														
<p>39.00</p>	<p>Descend steep NE. slope.</p>															
<p>39.970</p>	<p>The ¼ sec. cor. of sec. 25 only, monumented with the original basalt stone, 17 x 13 x 5 ins. (record, 15 x 13 x 5 ins.), firmly set, projecting 3 ins. above ground, with no clear marks.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>															

UNION COUNTY SURVEYOR	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>MLG/Hmc</i>
File No.	148-2013R