


# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

40.175 The ¼ sec. cor. of secs. 34 and 35, monumented with the original slate stone, 19 x 11 x 5 ins., firmly set, projecting 3 ins. above ground, with illegible chisel marks on the E. face. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap, from which:



- A ponderosa pine, 20 ins. diam., bears N.2½°E., 140 lks. dist. mkd. ¼ S35 BT.
- A ponderosa pine, 19 ins. diam., bears N.19¼°W., 156 lks. dist. mkd. ¼ S34 BT.

Deposit a white "DEEP-1" magnetic marker at the base and set a 6 ft. steel fence post alongside the stainless steel post.

From this point, a decayed pine stump, size indeterminate, no marks visible, bears S., 1.1975 chs. dist.

**Description of corner evidence found:**

Found a 2½" B.L.M. brass cap, 4" above ground, from which:

- A pine, 20" diam., bears N.02°36'E., 92.32', with a 15" x 5" blaze, scribed "¼ S35 BT".
- A pine, 20" diam., bears N.19°11'W., 102.28', with a 16" x 3" blaze, scribed "¼ S34 BT".

**Description of monument and accessories I established to perpetuate the original location of this corner:**

- A pine, 7" diam., bears S.26°47'W., 26.80', with a 13" x 3" blaze, scribed "¼ S34 BT".
- A pine, 14" diam., bears S.62°59'E., 33.51', with a 14" x 3" blaze, scribed "¼ S35 BT".

**UNION COUNTY  
SURVEYOR**

---

Date Received 10/18/84

Date Filed 10/23/84

By Gregory T. Glavin

File No. 135-1994R

REGISTERED  
**PROFESSIONAL  
LAND SURVEYOR**

*Ronald E. Stoll* 10/94

---

OREGON  
JULY 15 1983  
**RONALD E. STOLL**  
2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
 State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
 for record on the \_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
 \_\_\_\_\_ by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)

AN

X-17

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
19.50	Barbed wire fence, bears E. and W.
22.50	Descend NW. slope, to ravine, thence ascend.
40.175	<p>The ¼ sec. cor. of secs. 34 and 35, monumented with the original slate stone, 19 x 11 x 5 ins., firmly set, projecting 3 ins. above ground, with illegible chisel marks on the E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 5 S R 41 E S 34   S 35 1991</p> <p>from which new bearing trees</p> <p style="padding-left: 40px;">A ponderosa pine, 20 ins. diam., bears N. 2½° E., 140 lks. dist., mkd. ¼ S35 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 19 ins. diam., bears N. 19¼° W., 156 lks. dist., mkd. ¼ S34 BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base and the corner stone alongside the stainless steel post.</p> <p>From this point, a decayed pine stump, size indeterminate, no marks visible, bears South, 1.975 chs. dist.</p>
	N. 0° 19' 30" W., beginning new measurement.
	Ascend S. slope, through logged area.
1.40	Barbed wire fence, extends E. and W., leave logged area; enter timber.
14.00	Descend NW. slope.
20.320	<p>Point for the N 1/16 sec. cor. of secs. 34 and 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S 34   S 35 1991</p> <p>from which</p> <p style="padding-left: 40px;">A fir, 12 ins. diam., bears N. 37° E., 69 lks. dist., mkd. N 1/16 S35 BT.</p> <p style="padding-left: 40px;">A fir, 17 ins. diam., bears N. 24° W., 80 lks. dist., mkd. N 1/16 S34 BT.</p>

UNION COUNTY  
SURVEYOR

Date Received 3/5/13

Date Filed 3/5/13

By R. L. G. [Signature]

File No. 160-2013R

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2018023

1/4 SECTION CORNER COMMON TO SECTIONS 34 AND 35

TWP. 5 S RGE. 41 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: March 29, 2018

LAT: 45 ° 5 ' 12.55061 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 117 ° 39 ' 47.74603 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 530607.265 INT FT.

E: 8934581.736 INT FT.

TYPE: GPS

THETA: 2 ° 0 ' 42.3877163 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998956004

ELEV: 4233.22 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" brass cap monument with cap marked as shown.

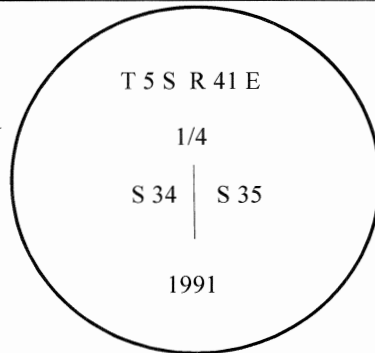

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*  
OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)