


Index File No. X 25 CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Tract or Survey No. \_\_\_\_\_ Cor. No. \_\_\_\_\_  
T 55 R. 41 E R.D. LaGrande County Union  
Merid. Willamette N.F. W-W State Oregon

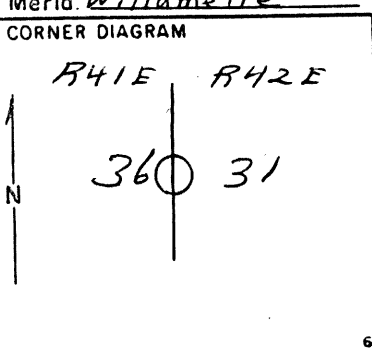

DESCRIBE CORNER MONUMENT FOUND  
Stump Hole

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND  
Live 28" W. Fir 577 w Partial scribe visible in opened blaze  
Other BT is a stump hole N53E  
Corner about 20' S of an old logging road

PHOTO IDENTIFICATION DATA  
Photo No. \_\_\_\_\_  
Filed At. \_\_\_\_\_  
Object Ident. \_\_\_\_\_  
Ident. By \_\_\_\_\_  
*Signature*

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA  
State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_  
*Agency*

Signature Dahlstrom Title Wardeman Division \_\_\_\_\_ Headquarters \_\_\_\_\_ Date 10-10-85 FS-7100-52 (3/68)

NOTE: FOR S 36 ONLY!

**UNION COUNTY SURVEYOR**

Date Received \_\_\_\_\_  
Date Filed 12-28-87  
By G. LANGRISH, DEPUTY  
File No. 439-87R

X-25

Dependent Resurvey of the South Boundary  
(First Standard Parallel South),  
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
16.00	Descend SW. slope.
38.50	A spring of flowing water, drains S.
39.460	<p>The standard cor. of Tps. 5 S., Rs. 40 and 41 E., perpetuated from original evidence no longer visible and recorded by Gary L. Langlitz, Union County Deputy Surveyor, in 1984, recorded under file No. 932-84R, monumented with an aluminum pipe, 2 ins. diam., firmly set, projecting 10 ins. above a mound of stone, 3 ft. diam., with aluminum cap mkd.</p> <p style="text-align: center;">UNION COUNTY SURVEYOR T 5 S R 40 E R 41 E SC <u>S 36   S 31</u> S 6 T 6 S R 41 E PLS 1099 1984</p> <p>from which bearing trees mkd. by Langlitz</p> <p>A ponderosa pine, 16 ins. diam., bears N. 61° E., 143 lks. dist., with fragmentary scribe marks visible on partially healed double blaze.</p> <p>A ponderosa pine, 16 ins. diam., bears N. 65½° W., 156 lks. dist., with scribe marks SC T5S R40 S36 visible on upper blaze and BT visible on lower blaze.</p> <p>A steel fence post is set alongside the aluminum post.</p> <p>From this point, United States Geological Survey triangulation station "REEVES," bears N. 19° 06' 30" E., 39.595 chs. dist., monumented with a standard brass cap, firmly set in bedrock, with top mkd. US GEOLOGICAL SURVEY REEVES 1964 and a triangle at the center.</p>
	<p style="text-align: center;">Dependent Resurvey of a Portion of the East Boundary, T. 5 S., R. 41 E., Willamette Meridian, Oregon</p> <p style="text-align: center;">(Restoring the survey by Henry M. Thatcher, in 1879, and the resurvey by James P. Currin, in 1898)</p> <p>From the standard cor. of Tps. 5 S., Rs. 41 and 42 E. N. 0° 02' 00" E., on the E. bdy. of sec. 36.</p> <p>Descend NE. slope.</p>
1.05	Graveled road, 30 lks. wide, bears N. 50° W. and S. 50° E.
40.325	The ¼ sec. cor. of sec. 36 only, determined in the root hole of the original corner tree, from which the remaining original bearing tree:

<b>UNION COUNTY SURVEYOR</b>	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>M. L. Gillman</i>
File No.	162-2013R

417

Dependent Resurvey of a Portion of the East Boundary,  
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS

A fir, 26 ins. diam., bears S. 77° W., 30 lks. dist.,  
with scribe mark S legible on rotten blaze.

At the corner point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins.  
in the ground, with brass cap mkd.

T 5 S  
R 41 E | R 42 E  
¼ S 36 |  
1991

from which a new bearing tree

A larch, 15 ins. diam., bears N. 75¼° W., 31 lks. dist.,  
mkd. ¼ S36 BT.

Deposit a white "DEEP-1" magnetic marker at the base and set a 6  
ft. steel fence post alongside the stainless steel post.

North, beginning new measurement.

1.00 Track road, 15 lks. wide, bears N. 10° W. and S. 10° E.; desc.  
gradually over broken NW. slope.

38.00 Graveled road, 30 lks. wide, bears NE. and SW.

40.595 The cor. of secs. 25 and 36 only, perpetuated and recorded by  
James G. Voelz, Oregon Registered Land Surveyor No. 381, in 1969,  
recorded under file No. 726-84R, monumented with an iron post, 2½  
ins. diam., firmly set, projecting 8 ins. above ground, with brass  
cap mkd.

COR  
T 5 S  
R 41 E | R 42 E  
S 25 |  
S 36 | S 31  
ORE LIC 381  
1969

from which remains of original bearing trees

A root hole, bears S. 60° E., 5 lks. dist., with  
loose blaze alongside, with scribe mark S legible.

A root hole, bears S. 60° W., 5 lks. dist., with  
loose wood alongside, with old blaze and axe marks.

A larch, 24 ins. diam., bears N. 61° W., 8 lks. dist.,  
with scribe marks S2 legible on opened blaze.

and bearing trees mkd. by Voelz

A fir, 15 ins. diam., bears S. 42° E., 29 lks. dist.,  
with healed double blaze.

UNION COUNTY SURVEYOR	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>M. G. Sloan</i>
File No.	162-2013R