


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

SURVEYED BY: P. GRIFFIN, 1993, GROUP NO. 1000 AND 1484

The standard cor. of secs. 34 and 35, monumented with the original slate stone, 14 x 10 x 5 ins., loosely set 3 ins in the ground, mkd. SC on the S face, and with 6 grooves on the N., 2 grooves on the E., and 4 grooves on the W. edges, from which the remains of an original bearing tree:



A root hole, with loose pine roots within, bears N.35°E., 95 lks. dist. ins. diam., bears

Set a stainless steel post 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap, from which:

A ponderosa pine, 20 ins. diam., bears N.28½°E., 11 lks. dist. mkd. T5S R41E S35 SC BT.
A ponderosa pine, 21 ins. diam., bears N.82°W., 11 lks. dist. mkd. T5S R41E S34 SC BT.

Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.

The corner is located 12 lks. S. of a barbed wire fence, extending E. and W.

Description of corner evidence found:

Found a 3" BLM brass capped pipe, cap marked per diagram, 0.3 above the ground, no stone mound, from which:

A pine, 16" diam., bears N.23°11'E., 7.22', with a 24" x 3" blaze, scribed "T6S R41E S35 SC BT".
A pine, 18" diam., bears N.82°16'W., 7.22', with a 23" x 3" blaze, scribed "T5S R41ES35 SC BT".

Description of monument and accessories I established to perpetuate the original location of this corner:

A pine, 10" diam., bears S.05°40'W., 29.71', with a 7" x 3" blaze, scribed "BT".
A pine, 11" diam., bears S.52°05'E., 36.36', with a 6" x 4" blaze, scribed "X BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: DAVID SUTHERLAND
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY
REGISTERER

Date Received 10/28/98
Date Filed 10/31/98
By R. ROBINSON, Deputy
File No. 101-1998.R

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Ronald E. Stoll 9/98

GREGON
JULY 15, 1993
RONALD E. STOLL
2058

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 19____
_____ by _____
(COUNTY OFFICIAL) (DEPUTY)


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Z-17

History of original corner establishment:

SURVEYED BY: P. GRIFFIN, 1993, GROUP NO. 1000 AND 1484

The standard cor. of secs. 34 and 35, monumented with the original slate stone, 14 x 10 x 5 ins., loosely set 3 ins in the ground, mkd. SC on the S face, and with 6 grooves on the N., 2 grooves on the E., and 4 grooves on the W. edges, from which the remains of an original bearing tree:

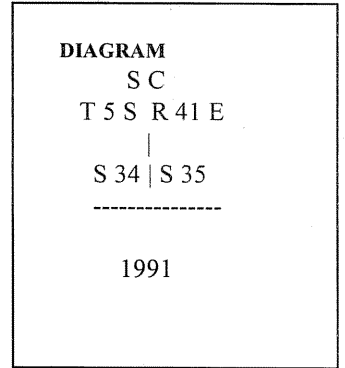

A root hole, with loose pine roots within, bears N.35°E., 95 lks. dist.

Set a stainless steel post 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap, from which:

A ponderosa pine, 20 ins. diam., bears N.28½°E., 11 lks. dist. mkd. T5S R41E S35 SC BT.
A ponderosa pine, 21 ins. diam., bears N.82°W., 11 lks. dist. mkd. T5S R41E S34 SC BT.

Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.

The corner is located 12 lks. S. of a barbed wire fence, extending E. and W.

Description of corner evidence found:

Found a 3" BLM brass capped pipe, cap marked per diagram, 0.3' above the ground, no stone mound, from which:

A pine, 16" diam., bears N.23°11'E., 7.22', with a 24" x 3" blaze, scribed "T5S R41E S35 SC BT".

A pine, 18" diam., bears N.82°16'W., 7.22', with a 23" x 3" blaze, scribed "T5S R41E S34 SC BT".

Description of monument and accessories I established to perpetuate the original location of this corner:

A pine, 10" diam., bears S.05°40'W., 29.71', with a 7" x 3" blaze, scribed "BT".
A pine, 11" diam., bears S.52°05'E., 36.36', with a 6" x 4" blaze, scribed "X BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: DAVID SUTHERLAND
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
BASIS OF BEARING WAS GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY SURVEYOR

Date Received 1/4/06

Date Filed 9/9/06

By R. ROBINSON, Deputy

File No. 025-2006R

REGISTERED PROFESSIONAL LAND SURVEYOR

R. Stoll 6/04

OREGON
 JULY 15, 1983
 RONALD E. STOLL
 2058

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 20____.

(COUNTY OFFICIAL) (DEPUTY)
CA

Dependent Resurvey of the South Boundary
 (First Standard Parallel South),
 T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
	<p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p> <p>The corner is located 25 lks. S. of a barbed wire fence, extending E. and W.</p> <p>Descend NW. slope.</p>
79.300	<p>The standard cor. of secs. 34 and 35, monumented with the original slate stone, 14 x 10 x 5 ins., loosely set 3 ins. in the ground, mkd. SC on the S. face, and with 6 grooves on the N., 2 grooves on the E., and 4 grooves on the W. edges, from which the remains of an original bearing tree:</p> <p>A root hole with loose pine roots within, bears N. 35° E., 95 lks. dist.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>SC</p> <p>T 5 S R 41 E</p> <p>S 34 S 35</p> <p>1991</p> </div> <p>from which new bearing trees</p> <p>A ponderosa pine, 20 ins. diam., bears N. 28½° E., 11 lks. dist., mkd. T5S R41E S35 SC BT.</p> <p>A ponderosa pine, 21 ins. diam., bears N. 82° W., 11 lks. dist., mkd. T5S R41E S34 SC BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base and the corner stone alongside the stainless steel post.</p> <p>The corner is located 12 lks. S. of a barbed wire fence, extending E. and W.</p>
	<p>S. 89° 07' 30" W., on the S. bdy. of sec. 34.</p> <p>Over gradual S. slope along wire fence.</p>
11.910	<p>From this point, the corner of wire fences extending E. and S., bears North, 0.017 chs. dist.; desc. SW. slope.</p>
16.25	<p>Oregon State Highway No. 203, paved, 40 lks. wide, bears N. 10° W. and S. 10° E.; asc. gradually over pasture.</p>
30.00	<p>Leave pasture; asc. steep NE. slope through medium timber and undergrowth.</p>
	<p>The standard ¼ sec. cor. of sec. 34, monumented with the original slate stone, 24 x 10 x 6 ins., loosely set 3 ins. in the ground, mkd. ¼ on the N. face, from which the remains of an original bearing tree:</p>

UNION COUNTY
 SURVEYOR 4085

Date Received 3/5/13

Date Filed 3/5/13

By W. L. G. Mun

File No. 175-2013R