


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. J-13

History of original corner establishment: Original corner established in 1884 by William B. Barr.

A stone was set, 20x14x5, from which:

- 36" Pine bears N60°E, 6 lks.
- 36" Fir bears S60°E, 31 lks.
- 24" Pine bears S45°W, 40 lks.
- 36" Pine bears N30°W, 45 lks.

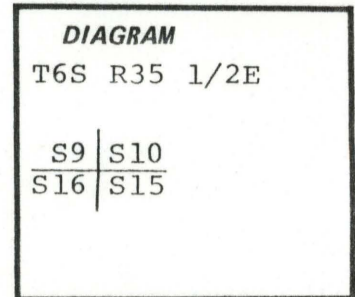

Description of corner evidence found:

No corner monument found.


Bearing trees found:

- 25" green Ponderosa Pine bears N60°E, 6 lks., face healed and did not open.
- 29.5" dead standing Fir bears S60°E, 31 lks., face healed and did not open.
- 14" green Ponderosa Pine bears S45°W, 40 lks., open blaze scribed: T6S R35 1/2E S16.
- 30" decayed stump bears N30°W, 75 lks., no marks.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2.5"x30" aluminum capped aluminum pipe stamped:  
Pipe rises 8" above ground.  
Set steel fence post 3 ft. north of corner.

T6S R35 1/2E



New BT's:

- 6.5" Ponderosa Pine bears S26.5°E, 18.4 ft., blazed & scribed: T6S R35 1/2E S15 BT.
- 11" White Fir bears N63°W, 22.5 ft., blazed & scribed: T6S R35 1/2E S9 BT.

RLS 1848  
1986

Attached 3/4" brass washer marked RLS 1848 to the lower blaze.

I hereby certify the above corner point was perpetuated as hereon described on February 14, 1986. USFS bearing tree signs were placed on all BT's and a 6" red band was painted around each BT.

**UNION COUNTY  
SURVEYOR**

---

Date Received 3-10-86

Date Filed 3-10-86

By G. LANGLITZ, DEPUTY

File No. 4-86 R



Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)