

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. L-21

History of original corner establishment:

Original corner established in 1883 by William B. Barr under contract #492. Set Pine Post 3"x3"x3', 24" in ground. From which: A 48" Pine bears N20°W, 22 lks. A 36" Pine bears S45°E, 28 lks.



Description of corner evidence found:

Found pieces of charred stake 12"-24" deep, from which: The root hole of a 48" dead&down pine bears N20°W, 22 lks., blaze open and burned out A 33" P. Pine stump bears S45°E, 28 lks. Cut open the toe of the blaze, portion of 'T' visible.

Description of monument and accessories established to perpetuate the original location of this corner:

From evidence, I set a 2 1/2"x30" aluminum capped aluminum pipe rising 6" in a mound of stones. Set steel fencepost 3 ft. North of corner. Cap is stamped: T6S R35 1/2 E 1/4 S14 | S13 RLS1848 1987


New BT's: A 7 1/2" W. Larch bears S88 1/4°W, 10.5 ft., blazed&scribed: 1/4 S14BT A 10" D. fir bears S65 3/4°E, 10.3 ft., blazed&scribed: 1/4 S13BT

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. A 3/4" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes.

From USFS Rd. 5178025, follow Rd. 5178029 1/4 mile SE'ly. corner is approx 50 ft. West of road.

Compass declination: 18 1/2°E Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were established as hereon described on May 23, 1987.

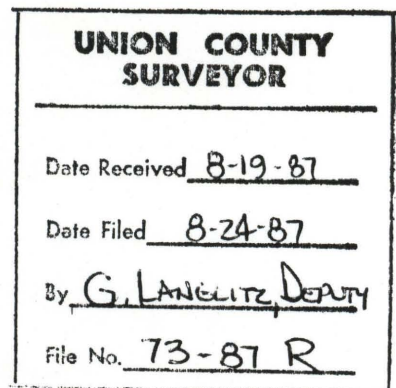

Office of..... County of..... State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19..... by..... (COUNTY OFFICIAL) (DEPUTY)