


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. C-21

History of original corner establishment:

The original subdivision of T6S, R35E was by Herman D. Gradon under Contract No. 499, approved November 24, 1884. At this corner he set a post, from which a 5" Pine bears S55°E, 41 lks. and a 6" Pine bears N75°W, 83 lks.

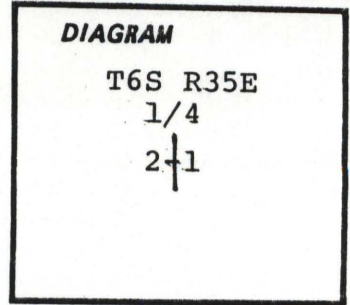

Description of corner evidence found:

No corner monument or evidence found.

UNION COUNTY SURVEYOR
Date Received <u>10-17-84</u>
Date Filed <u>10-24-84</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>1003-84R</u>

Description of monument and accessories established to perpetuate the original location of this corner:

At proportioned location, set 2.5" aluminum cap on 2 3/4"x30" aluminum pipe rising 5" above ground.

Set steel fence post 3.0 ft. north of corner.

New BT's:

A 7" Tamarack bears N29°W, 68.6 ft., blazed and scribed; 1/4 S2 BT.

A 9" Fir bears N66°E, 99.0 ft., blazed and scribed; 1/4 S1 BT.

Brass LS 1844 disc in lower end of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 3/4°E

Witness: Duane Scott

Corner is found 40 ft. west of fence and 1350 ft. west of Sheep Creek. Road 5160-142 east to fence. Corner is 500 ft. North.

I hereby certify the above described corner monument and/or accessories was established as described on September 4, 1984.

Cap is stamped:

T6S R35E
1/4
S2+1
RLS 1844
1984

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>David E. Scott</i>
OREGON JULY 13, 1979 DAVID E. SCOTT 1844

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)