


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. Z-23

History of original corner establishment:

Original corner established in 1884 by Herman D. Gradon under contract #499. Set basalt stone 12"x10"x8", 8" in ground. From which: An 8" pine bears N32°W, 11 lks. An 8" pine bears S32°E, 4 lks.

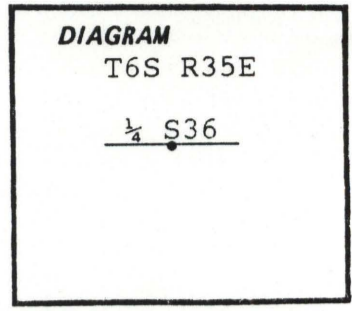

Description of corner evidence found:

Found broken stone, no marks. From which:

The roothole for a 7" dead&down lodgepole pine bears N32°W, 11 lks. Open blaze, '1/4 SBT' visible.

Note: In 1982, Dennis Gaylord stated on search card that he found the root crown matched the root hole, supporting that this tree was Northwest of the corner with the blaze facing SE.

Description of monument and accessories I established to perpetuate the

original location of this corner: Cap is stamped: At the location of the broken stone, I set a 2 1/2"x30" Aluminum capped aluminum pipe rising 8" in a mound of stones. Set steel fencepost 3' North of corner.

T6S R35E 1/4 S36 RLS1848 1987

New BT's:

A 6" D. Fir bears N52°W, 15.5 ft., blazed&scribed: 1/4 S36BT A 9 1/2" D. Fir bears N41 1/4°E, 42.1 ft., blazed&scribed: 1/4 S36BT

Painted blazes and attached signs as per Standard specifications for Cadastral Surveys, USFS Region 6, March 1982. A 1/4" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes.

From the summit of White Pine Knob, follow ridge South 600 ft. to a small rocky knoll. Corner is 120 ft. east on easterly slope.

Compass declination: 20 1/4°E Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were established as hereon described on June 27, 1987



UNION COUNTY SURVEYOR Date Received 8-19-87 Date Filed 8-24-87 By G. LANGLITZ, Deputy File No. 67-81R

Office of..... County of..... State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19..... by..... (COUNTY OFFICIAL) (DEPUTY)