


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. B-04

History of original corner establishment:

None.

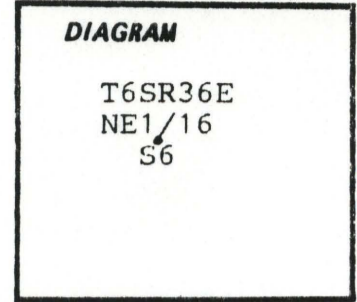

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

Corner set by intersection. I set a 2½"x30" aluminum capped aluminum pipe rising 4". No stones available. Set steel fencepost 3' North of corner.

Cap is stamped:

T6S R36E
NE1/16
S 6
RLS1848
1987

New BT's:

A 9" W. Larch bears N4¼°W, 180.3 ft., blazed&scribed: NE1/16S6BT
A 7" L. Pine bears N57°E, 174.3 ft., blazed&scribed: NE1/16S6BT

Painted blazes and attached signs as per Standard specifications for Cadastral Surveys, USFS Region 6, March 1982. A ¼" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes.

From Rd. 5178123, take Rd. 5178095 approx. ¼ mile Northerly. Corner is up hill to the West, 300 ft. on posted line.

Compass declination: 18½°E
Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were established as hereon described on July 2, 1987.



UNION COUNTY SURVEYOR
Date Received <u>8-19-87</u>
Date Filed <u>8-24-87</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>80-87R</u>

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)