


24-69A

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

1
E-25
9

History of original corner establishment:
 Original survey by contract survey in 1882
 The original notes read; Set a basalt stone 18x18x6 to corner of section 1,6,12 and 7 of T6S R35½E, R36E, from which; A pine 24" in diam bears N35°E 80 lks dist marked T6S R36E S6BT.
 A pine 36" in diam bears S20°E 16 lks dist. marked T6S R36E S7BT.;
 A pine 24" in diam bears S40°W 64 lks dist marked T6S R35½E S12BT.;
 A pine 36" in diam bears N60°W 28 lks dist marked T6S R35½E S1 BT.

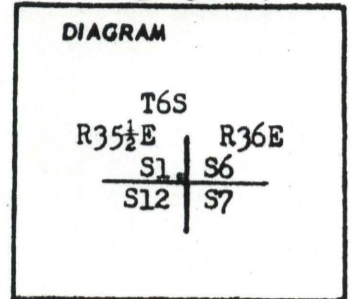

Description of corner evidence found:

In section 6 a 24" stump was found with scribe
 In section 7 a log 23" in diam
 In section 12 a 22" down pine log with full scribe visible.
 In section 1 found a down 30" pine with scribe visible.
 We could not find the stone.

REGISTERED
 OREGON
 LAND SURVEYOR

James G. Voelz

MAY 4, 1956
 JAMES G. VOELZ
 381

Description of monument and accessories I established to perpetuate the original location of this corner

Set a 2" galvanized pipe 30" long and 24" in the ground with bronze cap and 8" plate welded to bottom. The hole was back filled with stone and tamped soil.

I marked the disk.

COR
 T6S
 R35½E R36E
 S1 | S6
 S12 | S7
 ORE LIC 381
 1969

A pine stump 24" in diam bears N35°E 80 lks dist.
 A down pine log 23" in diam bears S20°E 16 lks dist.
 A down pine log bears S40°W 64 lks dist.
 A down pine log 30" in diam bears N60°W 28 lks dist; I also established four new BT'S;
 A pine 7" in diam bears N 17°E 31.7 ft. marked T6S R36E S6BT.
 A fir 12" in diam bears S4°E 35.7 ft. dist marked T6S R36E S7BT.
 A fir 15" in diam bears S79°W 41.6 ft. dist marked T6S R35½E S12BT.
 A pine 12" in diam bears N15°W 28.6 ft. dist marked T6S R35½E S1 BT.
 Set a steel fence post with USFS sign 54-4 attach. Set USFS bearing tree signs on the eight bearing trees facing the corner.

Office of.....County Surveyor..... County of..... Union
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the 26... day of July....., 1969... at 8... o'clock A...m., (signed)
 County Surveyor..... by *James G. Voelz*
 (COUNTY OFFICIAL) (IDENTITY)


UNION COUNTY
 SURVEYOR

Date Received _____
 Date Filed _____
 By _____
 File No. 7638-84 R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. E-25

History of original corner establishment: Corner established in 1881 by Eugene P. McCornack under Contract No. 398.

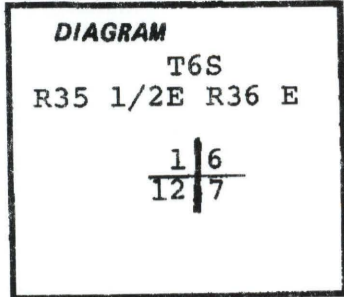

An 18x8x6 stone was set, from which:
a 24" Pine bears N35°E, 80 lks.,
a 36" Pine bears S20°E, 16 lks.,
a 24" Pine bears S40°W, 64 lks., and
a 36" Pine bears N60°W, 28 lks.

COR
T6S
R35 1/2E R36E

Cap is stamped:

S1	S6
S12	S7

ORE LIC 381
1969

Description of corner evidence found:
Found 3" brass cap on 2 3/8" iron pipe rising 8" in mound of stones. Found steel fence post 2 ft. east of corner.

BT's found:

- 13" D. Fir, good condition, blaze healed, bears N24 1/2°E, 31.7 ft.
- Pine stump, badly decayed, no marks, bears N35°E, 80 lks.
- Badly decayed Pine, no marks, bears S40°E, 16 lks.
- 18" D. Fir, good condition, blaze healed, bears S1°E, 35.3 ft.
- Badly decayed Pine, no marks, bears S40°W, 64 lks.
- 16.5" D. Fir, open blaze, bears S77°W, 41.6 ft., scribing visible:
T6S R35 1/2E S.
- 20" dead & down Pine, open blaze bears N60°W, 28 lks., scribed:
T6S R35 1/2E S1.
- 14" P. Pine, partially healed blaze bears N15°W, 28.6 ft., scribing visible:
6S R35 1/2E S1.

Description of monument and accessories established to perpetuate the original location of this corner:

The Voltz Section 6 BT is a 13" Douglas Fir instead of Pine listed on certificate and bears N24 1/2°E instead of N17°E. I painted blazes and red bands and signed trees where necessary.

To find corner: from milepost 1.3 on 5125, take river crossing through green gate, left fork 3/4 mile, left fork 1 1/4 mile. Corner is 200 ft. east, visible from road on westerly slope.

Compass Declination: 19 1/2°E
Witness: J. Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as herein perpetuated as hereon described on June 10, 1986.

UNION COUNTY SURVEYOR
Date Received <u>6-19-86</u>
Date Filed <u>6-19-86</u>
By <u>G. LANGLITZ, Deputy</u>
File No. <u>90-86 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>[Signature]</i>
OREGON JULY 13, 1879 B. A. SUTTON 1848

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)