

103-69A


95

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-3

History of original corner establishment:

Original survey by General Land Office contract survey 1884  
The original notes state; Set a basalt stone 20x14x5  
from which;  
A fir 12" in diam bears N45°W 32 lks dist marked  $\frac{1}{4}$  SBT;  
Aspruce 12" in diam bears S70°E 3 lks dist marked  $\frac{1}{4}$  SBT;

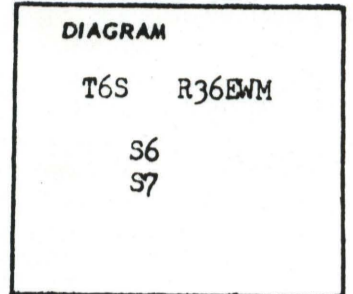

Description of corner evidence found:

A fir 15" in diam bears N45°W 32 lks dist. with scribe visible.  
Tree is in good condition.



Description of monument and accessories I established to perpetuate the original location of this corner

At the position of the corner I set a 2" galvanized pipe 30" long with a bronze cap on top and 8" plate welded to bottom.  
The pipe set to a depth of 22" and back filled with stone and tamped soil.

I stamped the disk.

$\frac{1}{4}$ COR  
T6S R36E  
S6  
S7  
ORE LIC 381  
1969

From the monument the original bearing tree is;  
A fir 15" in diam bears N45°W 32 lks dist.;  
I set the following new bearing trees;  
A spruce 10" in diam bears S5°W 24.3 ft. dist marked  $\frac{1}{4}$  SBT  
A spruce 14" in diam bears S86°E 11.6 ft. dist marked  $\frac{1}{4}$  SBT.  
The distance is measured to center of trees and marked with scribe.  
I set a steel fence post with USFS sign 54-4 attached and USFS National Forest boundary signs indicating National Forest land to North and East. Bearing tree signs were placed on the bearing trees shoulder high facing the corner.

Office of.....County surveyor..... County of..... Union

State of.....Oregon....., I hereby certify that the within instrument was filed in this office for record on the 29 day of Sept, 1969, at 9 o'clock A. m. (signed)

.....County surveyor..... by  
(COUNTY OFFICIAL)

*James G. Voelz*  
(DEPUTY)


UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
By	_____
File No	7039-84R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. E-03

History of original corner establishment: Original corner established in 1883 by William B. Barr under Contract No. 492.

A 20"x14"x5" stone was set, from which a 12" Fir bears N45°W, 32 lks. and a 12" Spruce bears S70°E, 3 lks.

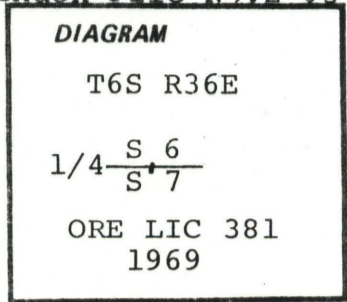

**Description of corner evidence found:**

Found 3" brass cap on 2 3/8" iron pipe rising 10" in mound of stones.

**Bearing trees found:**

- 16" D. Fir bears N45°W, 32 lks., open blaze, scribing visible: 1/4 S BT.
- 17" Spruce bears N86°E, 11.1 ft., open blaze, scribing visible: 1/4S BT, (by LS 381)
- 14" Spruce bears S5°W, 24.1 ft., blaze healed, (by LS 381).

Cap is stamped: 1/4 COR  
T6S R36E  
 $\frac{S \ 6}{S \ 7}$   
ORE LIC 381  
1969

\*Note: The called bearing in the certificate by LS 381 appears to be in the wrong quadrant since this was intended to be the bearing tree for Section 6. Should be N86°E.

**Description of monument and accessories established to perpetuate the original location of this corner:**

Set new steel fence post 3 ft. north of corner.

Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 1/2°E  
Witness: J. Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on May 17, 1986.

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>5-21-86</u>
Date Filed <u>5-22-86</u>
By <u>G. LANGLITZ DEPUTY</u>
File No. <u>39-86 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>B. A. Sutton</i>
OREGON JULY 13, 1979 B. A. SUTTON 1848

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)