


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. E-04

History of original corner establishment:

None.

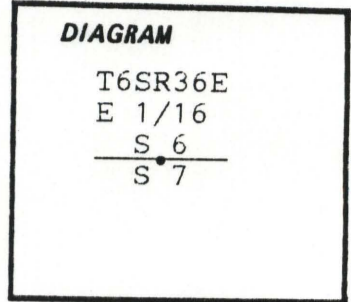

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

Cap is stamped: T6S R36E
 Corner set by single proportioning. I set a 2½"x30" aluminum capped aluminum pipe rising 6". No stones available. Set steel fencepost 3' West of corner.
 E1/16 $\frac{S\ 6}{S\ 7}$
 RLS1848
 1987

New BT's:

A 5" D. Fir bears N19¼°W, 25.7 ft., blazed&scribed: E1/16S6BT
 A 5½" D. Fir bears S24¼°E, 5.8 ft., blazed&scribed: E1/16S7BT

Painted blazes and attached signs as per Standard specifications for Cadastral Surveys, USFS Region 6, March 1982. A ¾" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes.

From Rd. 5125050, take Rd. 5125096 approx. ¼ mile. Corner is across the draw to the southwest, 300 ft.

Compass declination: 19°E

Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were established as hereon described on June 18, 1987.



UNION COUNTY SURVEYOR	
Date Received	<u>8-19-87</u>
Date Filed	<u>8-24-87</u>
By	<u>G. LANGLITZ DEPUTY</u>
File No.	<u>85-87 R</u>

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by

(DEPUTY)