


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner originally established by W.B. Barr under GLO contract number 492 dated August 22, 1883,

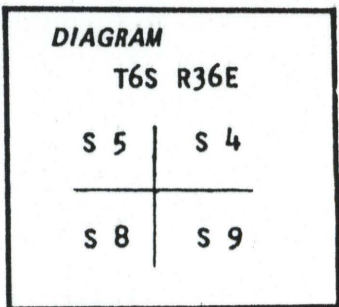

Surveyor General record states:  
Set basalt stone 26x12x10 ins 19 ins in ground for cor to Secs 4,5,8 & 9 marked with 4 notches on E and 5 notches on S from which

- A pine 12 ins in diam bears N50E 84 lks dist marked T6S R36E S4 BT
- A pine 10 ins in diam bears S70E 72 lks dist marked T6S R36E S9 BT
- A pine 12 ins in diam bears S55W 18 lks dist marked T6S R36E S8 BT
- A pine 8 ins in diam bears N60W 26 lks dist marked T6S R36E S5 BT

Description of corner evidence found:

Found the original Southeast bearing tree, now a 7 inch diameter lodgepole pine, dead and down with T6S R36E S9 BT scribes visible

Found slab of wood with illegible scribing loose and leaning on tree. Unable to determine original location of this slab.

Description of monument and accessories I established to perpetuate the


original location of this corner: At record bearing and distance from the above described Southeast bearing tree I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown 26 inches in the ground from which:

New BTs

- A 15 inch diameter Red Fir bears N29°E 75.1 feet marked T6S R36E S4 BT
- A 13 inch diameter Red Fir bears S42°E 50.9 feet marked T6S R36E S9 BT
- A 12 inch diameter Red Fir bears S62°W 10.4 feet marked T6S R36E S8 BT
- A 25 inch diameter Red Fir bears N8°W 54.6 feet marked T6S R36E S5 BT

Set a steel fence post approximately 5 feet North with 54-4 sign attached

Corner set September 21, 1984  
Witness: Rick Robinson

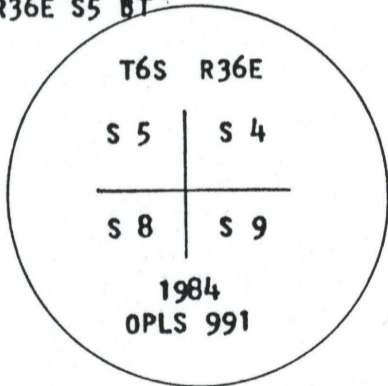

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the new bearing trees are to the center of the trees. I painted a 6 inch red band around all BTs and attached 54-4 signs and bearing tree signs. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	<u>9-23-84</u>
Date Filed	<u>9-25-84</u>
By	<u>G. LANGRIZ, Deputy</u>
File No.	<u>941-84 R</u>