


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by W. B. Barr under GLO contract number 492 dated August 22, 1883. Surveyor General notes state: Set granite stone 20"x12"x10", 15 inches in the ground for corner to sections 3, 4, 9, and 10, marked with 3 notches on East and 5 notches on the South, from which:

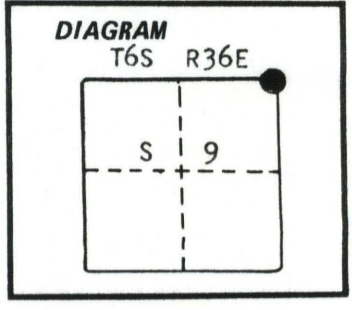

A Tamarack 8" in diameter bears N 60° E, 21 lks. distant, marked T6SR36E S3 BT.

A Pine 12" in diameter bears S 45° E, 29 lks. distant, marked T6S R36E S 10 BT.

A Pine 12" in diameter bears S 15° W, 28 lks. distant, marked T6S R36E S 9 BT.

A Pine 12" in diameter bears N 30° W, 38 lks. distant marked T6S R36E S 4 BT.

No record of subsequent remonumentation found in county records.  
Description of corner evidence found:


Found marked stone 17"x9"x7" in a mound of stone.

Found NE. BT. alive and standing, opened for scribing, scribes visible. Tree was opened in 1981, and is still vigerous. Tree is now a 16" diameter Tamarack.

Found SE BT dead and down badly rotted no scribes visible. Record bearing and dist.  
Found SW BT dead and down badly rotted no scribes visible. Record bearing and dist.  
Found NW BT dead and down badly rotted no scribes visible. Record bearing and dist.

Description of monument and accessories I established to perpetuate the original location of this corner: At the stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 28" in the ground and raised a mound of stone from which:

- Orig. BT.
- A 16" Tamarack bears N 60° E, 17 lks. marked T6SR36E S3BT.
- New BTs
- A 16" Tamarack bears S 2° E, 24.33 feet, marked T6S R36E S10 BT.
- An 11" Douglas Fir bears S 31° W, 46.65 feet, marked T6S R36E S9 BT.
- A 15" Tamarack bears N 89° W, 29.22 feet, marked T6S R36E S4 BT.

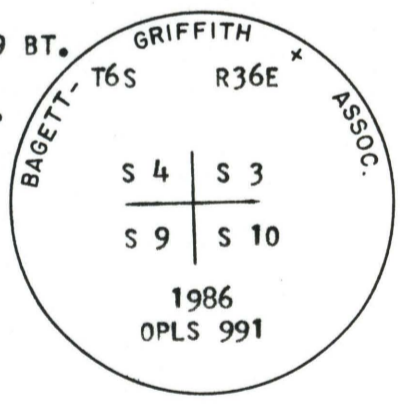

REGISTERED PROFESSIONAL LAND SURVEYOR

*Gregory T. Blackman*

OREGON JULY 13, 1973 GREGORY T. BLACKMAN 991

Brass washer marked OPLS 991 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distance to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR  
5-27-86  
Date Filed 5-27-86  
By G. Lawlitz, Deputy  
File No. 47-86 R